


# Mule Blocks - 12 Series, 8" (203 mm) Blocks

- Used to divert the cables around obstructions or change direction of travel.
- ASTM Class 30 grey iron sheave.
- Sealed precision ball bearings or tapered roller bearings.
- 7 gauge (4.55 mm) side plates fully enclose sheave.
- 3 gauge (6 mm) formed channel base.
- Four spacers between the side plates prevent cables from escaping the sheave grooves.
- **Mule blocks must be welded in place after final alignment** – consult the factory for specific information.

## Dimensions

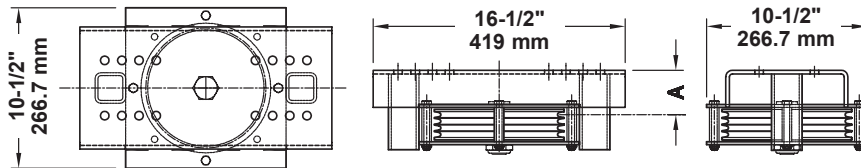

## Order Information

Number	Grooving	RWL Per Line	Max Total RWL 180°	Max Total RWL 90°	Height	"A"
<b>8" (203 mm) Mule Blocks—Cast Iron Sheave w/ Ball Bearings</b>						
500-10812C25	(1) 1/4" Cable (6.35 mm)	500 lbs. (227 kg)	500 lbs. (227 kg)	500 lbs. (227 kg)	4-1/16" (103.2 mm)	3-1/16" (77.8 mm)
500-20812C19	(2) 3/16" Cables (6.35 mm)	400 lbs. (181 kg)	800 lbs. (363 kg)	800 lbs. (636 kg)	4-1/16" (103.2 mm)	-
500-20812C25	(2) 1/4" Cables (6.35 mm)	500 lbs. (227 kg)	1000 lbs. (453 kg)	1000 lbs. (453 kg)	4-1/16" (103.2 mm)	-
<b>8" (203 mm) Mule Blocks—Cast Iron Sheave w/ Tapered Roller Bearings</b>						
500-10812C25T	(1) 1/4" Cable (6.35 mm)	500 lbs. (227 kg)	500 lbs. (227 kg)	500 lbs. (227 kg)	4-1/16" (103.2 mm)	3-1/16" (77.8 mm)
500-20812C19T	(2) 3/16" Cables (4.76 mm)	400 lbs. (181 kg)	800 lbs. (363 kg)	800 lbs. (363 kg)	4-1/16" (103.2 mm)	-
500-20812C25T	(2) 1/4" Cables (6.35 mm)	500 lbs. (227 kg)	1000 lbs. (453 kg)	1000 lbs. (453 kg)	4-1/16" (103.2 mm)	-
500-40812C19	(4) 3/16" Cables (4.76 mm)	400 lbs. (181 kg)	1400 lbs. (635 kg)	1600 lbs. (726 kg)	5-1/4" (133.3 mm)	2-15/16" (74.6 mm)
500-40812C25	(4) 1/4" Cables (6.35 mm)	500 lbs. (227 kg)	1400 lbs. (635 kg)	2000 lbs. (907 kg)	5-1/4" (133.3 mm)	2-15/16" (74.6 mm)
500-80812C19	(8) 3/16" Cables (4.76 mm)	700 lbs. (317 kg)	1400 lbs. (635 kg)	2000 lbs. (907 kg)	6-13/16" (173 mm)	-
500-80812C25	(8) 1/4" Cables (6.35 mm)	500 lbs. (227 kg)	1400 lbs. (635 kg)	2000 lbs. (907 kg)	6-13/16" (173 mm)	-

Dimension "A" is from the base to the center of the first block groove.

**RWL:** RWL is maximum load that can be applied to a block which is in "like new" condition and has been properly installed, maintained, and operated.

