


# T-Bar Guide Systems

- Used to guide counterweight arbors
- 6" (152 mm) and 8" (203 mm) centers are standard, other centers are available
- T-Bar systems supplied complete with required T-Bar, steel wall batten angles, stop battens, splice bars, U-clips, adjustable wall knees, bolts, nuts, and washers
- Adjustable wall knees allow simple, on site adjustment to meet field conditions
- Vertical T's are pre-punched 1-1/2" x 1-1/2" x 3/16" (38 mm x 38 mm x 5 mm) steel members
- Horizontal wall battens & stop battens are pre-punched 1-3/4" x 1-3/4" x 3/16" (45 mm x 45 mm x 5 mm) steel angle
- Optional 2" x 2" (51 mm x 51 mm) hardwood or hardwood with neoprene bumpers are available for stop battens
- Three-year warranty against defects in materials or workmanship is provided on all J.R. Clancy equipment, additional warranty information is available at jrclancy.com



**T-Bar Guide System  
012-1500**

## Dimensions

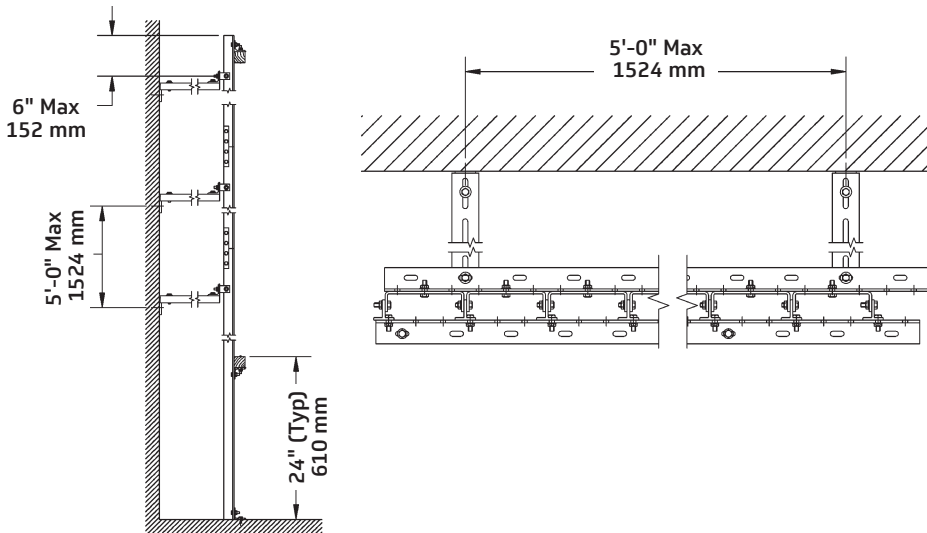

## Order Information

Guide systems are ordered in linear feet of guide required (number of runs of T x height of guide).

Number	Description	Weight
012-1500	T-Bar Guide System	4 lb/ft (5.9 kg/m)
112-1H	2" x 2" (51 mm x 51 mm) Hardwood stop batten	3 lb/ft (4.46 kg/m)
112-1N	2" x 2" (51 mm x 51 mm) Hardwood stop batten with 1/4" (6 mm) Neoprene	4 lb/ft (5.9 kg/m)

