


ADA Ramp

- Ramp design meets all guidelines of the Americans with Disabilities Act (ADA) according to the 2015 International Building Code (IBC) - Section 1012
 - Slope is not steeper than one unit vertical in twelve units horizontal (1:12)
 - Hand rails are continuous throughout ramp
 - Clear width on ramp is a minimum of 36" (914 mm)
 - Landings are a minimum of 60" x 60" (1524 x 1524 mm) at any direction change
 - Railings extend 12" (762 mm) at end of handrails
 - Contrasting color indications designate any elevation changes
- See the ADA Ramp Configurations Layout Guide for available pre-configured ramp designs
- Ramp design allows for different ramp configurations depending upon your needs
- Compact storage is ideal for facilities that have limited storage space
- Parts are labeled for quick set-up
- Ramp surface comes standard with slip-resistant quadriple surface; additional surfaces are available by request
- Adjustable legs are provided for easy leveling on uneven surfaces
- Ramp design and brackets allow for attachment to StageTek® or Versalite® stages
- Ten-year warranty
- Optional mid-rails are available



24" (610 mm) Elevation Ramp
is shown with optional mid rails

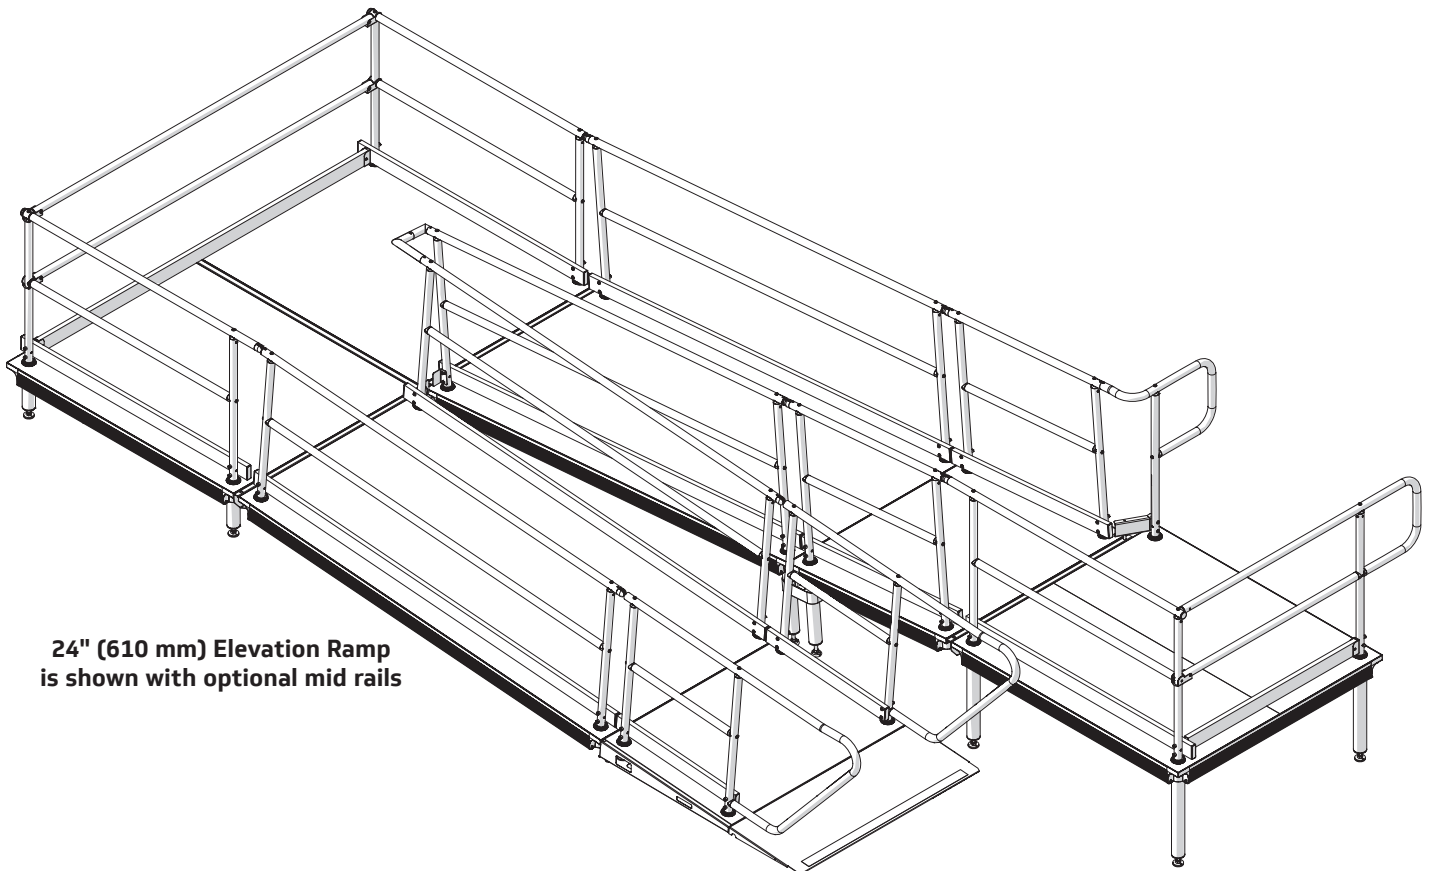