


Owner's Manual **Tourmaster Storage Cart**



Storage Cart

CONTENTS

Warranty	
Precautions	2
Safety	2
Load Back Rails	3
To Store Risers on the Storage Cart	
Load Risers onto the Cart	
Load Fourth Steps onto the Cart	.10
Replacement Parts List	

Note: Please take a few minutes to read this manual and to familiarize yourself with the Tourmaster Storage Cart unique operating features. If you should need additional information on your new Tourmaster Storage Cart, just write or phone.

SAFETY

Throughout this manual you will find CAUTIONS and WARNINGS which are defined as follows.

- WARNING means that failure to follow the instruction may result in serious injury or death.
- **CAUTION** means that failure to follow the instruction may result in serious injury or damage to the pit filler.

PRECAUTIONS

- Make sure that anyone using the Storage Cart is familiar with this manual.
- Two people are always required to move a loaded Storage Cart.
- Always use two people to load Risers onto the Storage Cart.
- Always load Risers first onto the bottom or the Storage Cart.
- Never laod anything on the Swing Arms unless Risers have been loaded first.
- A dangerous pinch point develops when the Swing Arm closes.



Never load anything on the top swing arms unless risers have been loaded first.



Two people are always required to move the loaded Cart.



Always use two people to load risers



Always start loading Risers at the bottom of the Storage Cart.



A Dangerous Pinch Point develops when the Swing Arm closes.

WARRANTY

The Tourmaster Storage Cart is guaranteed free of defects in materials and workmanship for three full years.

Our guarantee assures you of either a full refund or repair or replacement of the defective materials or workmanship without charge, at the discretion of our Customer Service Department. Just call a Customer Service Representative at 1-800-887-7145 and state the reason you are dissatisfied. If a product return is necessary, your representative will issue a return authorization. This is your sole remedy for breach of this warranty.

Should you have a question or problem with any Wenger product, don't hesitate to call, even if the product is past warranty. It's important to us that all our customers be satisfied.

This is the sole warranty made by Wenger. Wenger disclaims all other warranties, including the warranties of merchantability and fitness for a particular purpose, as well as all liability for incidental, consequential, special, and indirect damage. Wenger liability for direct damages shall be limited to the amount you paid for the product involved. Wenger reserves the right to make product changes without obligation to incorporate such changes into products previously sold.


Some states do not allow the exclusion or limitation of damages or warranties, so the above may not apply to you. This warranty gives you specific legal rights. You may also have other rights which vary from state to state.


TO STORE RISERS ON THE STORAGE CART


LOAD BACK RAILS

Load up to four Back Rails onto a Storage Cart as follows.

- 1. Lift a Back Rail with the Positioning Wheels on the legs pointing upward and the legs next to the Cart (Horizontal Rail is away from the Cart).
- 2. Place the Back Rail onto the Back Rail Supports with each Back Rail Leg facing toward the Back Rail Support Posts as shown below.

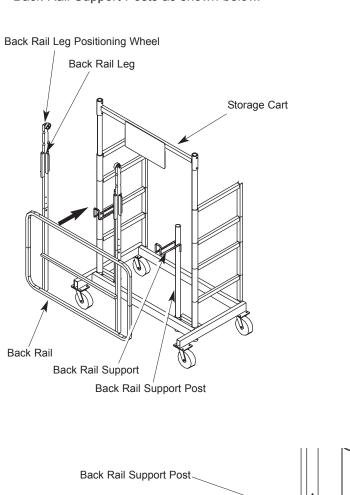







LOAD BACK RAILS CONTINUED

- 3. To load the second Back Rail, lift it with the Positioning Wheels on the legs pointing upward and the Back Rail Legs facing away from the Cart.
- 4. Place the Back Rail onto the Back Rail Supports with the Back Rail Horizontal Rails touching as shown below.

Note: Each pair of Back Rails can be loaded onto the Cart with either the Horizontal Rail touching or the Back Rail Legs nested together.

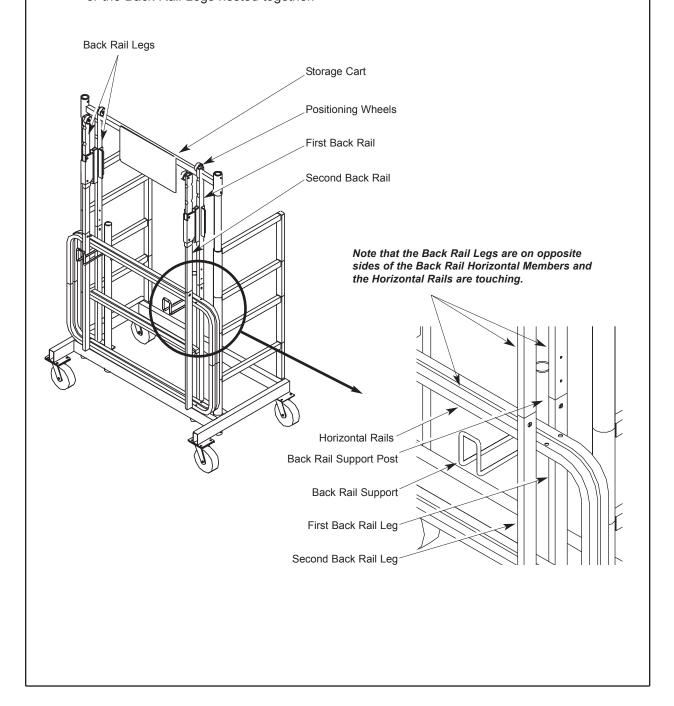


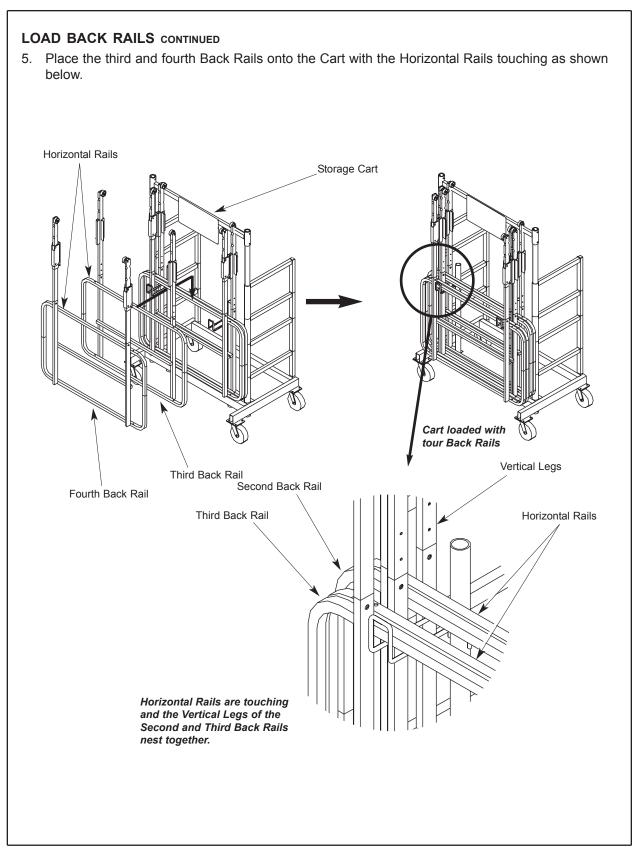


LOAD RISERS ONTO THE CART

Load up to four Risers onto the Storage Cart as follows.

1. Begin opening the Swing Arms by pushing upward on the under side of the Swing Arm Horizontal Bar as close to the Swing Arm Post as possible. Always start with the highest Arm and swing the Arm away from the Cart.

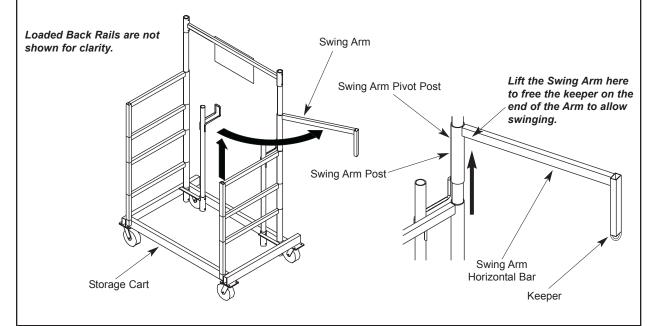


2. Continue opening all of the Swing Arms

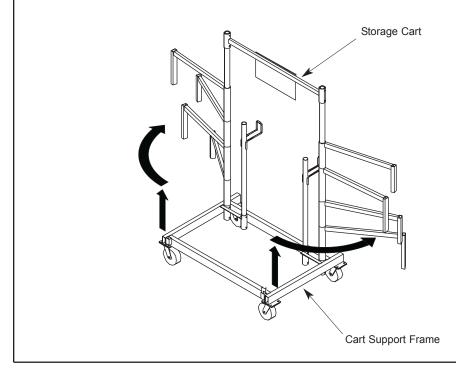

LOAD RISERS ONTO THE CART CONTINUED


3. With two people working together, place the first Riser onto the Cart. The Positioning Wheels will hang over the right end of the Cart Support Frame.

Note: The 13-inch Swing Arm must be on the right side of the Cart. If the 13-inch Swing Arm is not on the right side of the Cart, it is assembled incorrectly. Call Customer Service for assistance in the correct assembly.

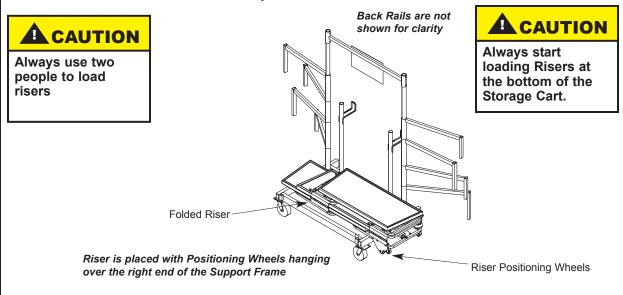


4. Close the two lower Swing Arms. It will be necessary to lift all of the Arms high enough for the two lower Arms to clear the Riser.

Note: When the Swing Arm Keeper is inserted into the Holding Socket, a dangerous pinch point develops. Serious injury is possible if this precaution is not observed.

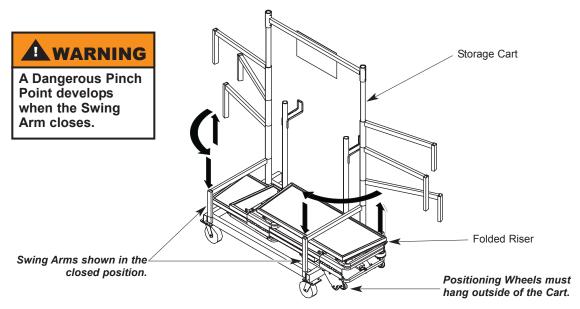


LOAD RISERS ONTO THE CART CONTINUED

5. With two people working together, place the second Riser onto the Cart with the positioning Wheels on the left end, opposite from the first Riser Positioning Wheels. Make sure that the Positioning Wheels hang outside of the Swing Arm.

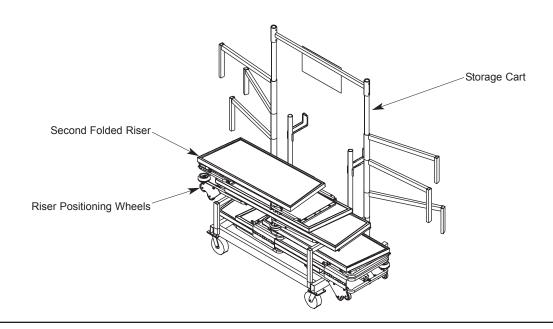

6. Close the two Swing Arms above the Riser. It will be necessary to lift all of the Arms high enough for the two Arms to clear the Riser.


Note: When the Swing Arm closes, a dangerous pinch point develops. Serious injury is possible if this precaution is not observed.

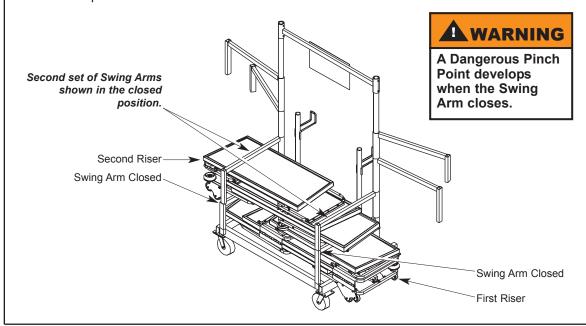

LOAD RISERS ONTO THE CART CONTINUED


7. With two people working together, place the third and fourth Risers onto the Cart (as in steps 2 to 6 above) with the Positioning Wheels alternating as shown below. Make sure that the Positioning Wheels hang outside of the Swing Arm.

Note: If the Storage Cart is to be transported by a vehicle, **always fasten each Riser to both Swing Arms** (or Storage Cart Frame for the lowest Riser) with rubber or polyurethane tie down cords or light duty cinch straps.

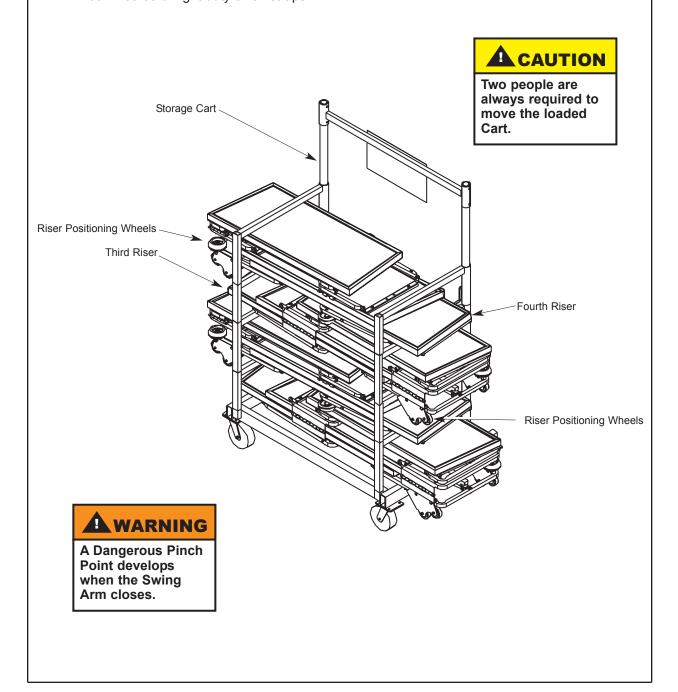


LOAD FOURTH STEPS ONTO THE CART

- 1. Place the first 4th-Step onto the top set of Swing Arms with the carpet side down and the Positioning Wheels facing outward (away from the Swing Arm Post).
- 2. Place the second 4th-Step with the carpet side up with the positioning wheels facing outward.
- 3. Place the third step carpet side down with the positioning wheels facing outward.
- 4. Place the fourth step carpet side up with positioning wheels facing outward.

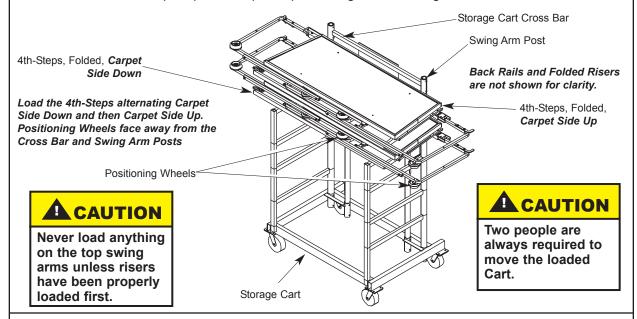

2. Fasten the Cinch Straps around the stacked 4th-Steps.

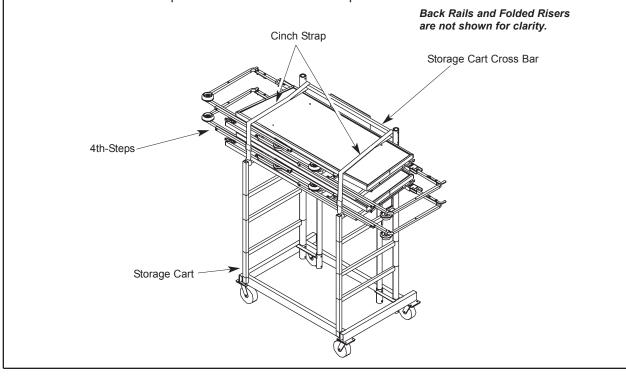

REPLACEMENT PARTS LIST

Storage Cart

