

GearBoss® Pass-Through Cubby Lockers

Wenger has designed a pass-through cubby system that not only looks great, but that functions better than metal alternatives. The units are designed to be open to the back for easy access and if needed can feature locking doors. The wood and metal frame construction can easily match lockers and building aesthetics. Integrated lock options can be matched to player lockers. These units provide a deep cubby that improves security and function. The high-density polyethylene shelves are easy to clean, ribbed for air-flow and feature a smooth bull-nose edge.

Intended Use

- The GearBoss Pass-Through Cubby Lockers are intended to maximize storage density in areas where there is a storage need and space limitations.
- The GearBoss Pass-Through Cubby Lockers are intended for indoor use in normal ambient temperature and humidity conditions - components must not be exposed to prolonged outside weather conditions.

Specifications

- Variety of styles tailored to different storage needs
- Available in total cabinet heights from 15" to 95" (381 to 2413 mm)
- Cubby sizing:

| Cubby rows | One to seven rows available (depending on cabinet height) | | | | | |
|--------------|---|----------------|--------------------|---------------------|---------------------|---------------------|
| Cubby widths | 6" (152 mm) | 8" (203 mm) | 9-3/8" (238 mm) | 12-3/8" (314 mm) | 19-1/2" (495 mm) | 25-1/2" (648 mm) |


- Wall panels are 3/4" (19 mm) thick industrial grade composite wood with no added formaldehyde and polyester laminate finish in Wenger standard colors
- Edging is 1/8" (3 mm) radiused PVC
- Patented shelves are blow-molded polyethylene mounted with self-lock shelf supports
- Grooved shelves allow air to circulate around items being stored
- Ventilation holes in casework for circulation help dissipate moisture and aid air circulation
- Door options:
 - Wood doors - same construction as wall panels
 - No door
- Door lock options:
 - Programmable digital lock
 - Locking slide bolt with strike plate designed for padlocks with 3/4" (19 mm) maximum vertical shackle clearance
- Doors include heavy-duty 5-knuckle institutional ANSI/BHMA A156.9, Grade 1 hinge, through - bolted to cabinet wall
- UL GREENGUARD Certified - Product certified for low chemical emissions: ul.com/gg - UL 2818
- Environmental attributes and LEED compliance for this product can be found at www.wengercorp.com/GREEN or by contacting your Wenger representative
- Ten-year warranty



Installation Requirements on following page.

Installation Requirements

- Lockers should be installed on an unfinished floor, tile or epoxy coated concrete flooring.
- Any additional floor coverings are to be installed after the lockers to avoid interference with the floor levelers.
- Verification of building dimensions to be confirmed by general contractor prior to construction.
Product is prefabricated in standard sizes.
- Wall opening(s) for pass-through cubby lockers must be a minimum of 1" (25 mm) wider than the pass-through cubby locker banks (including end cover panels when applicable) and a minimum of 1" (25 mm) taller than the pass-through cubby locker minimum height.
The wall opening size includes framing around the perimeter of the opening that will be used to shim/anchor the pass-through cubby lockers horizontally and vertically.
Wall opening(s) and framing must be complete prior to pass-through cubby locker installation.
- Finish trim to be provided & installed by others.
- Wall/floor area specified for pass-through cubby locker installation must be free of surface mounted obstructions such as light switches, outlets, hvac, pipes or conduit, window trim, clocks, signs, etc.
- End cover panels (at end of pass-through cubby locker rows) and closure panels to be supplied as shown per drawing.
- Floor(s) must be cleared of debris or equipment prior to pass-through cubby locker installation.
- Color combination to be selected.

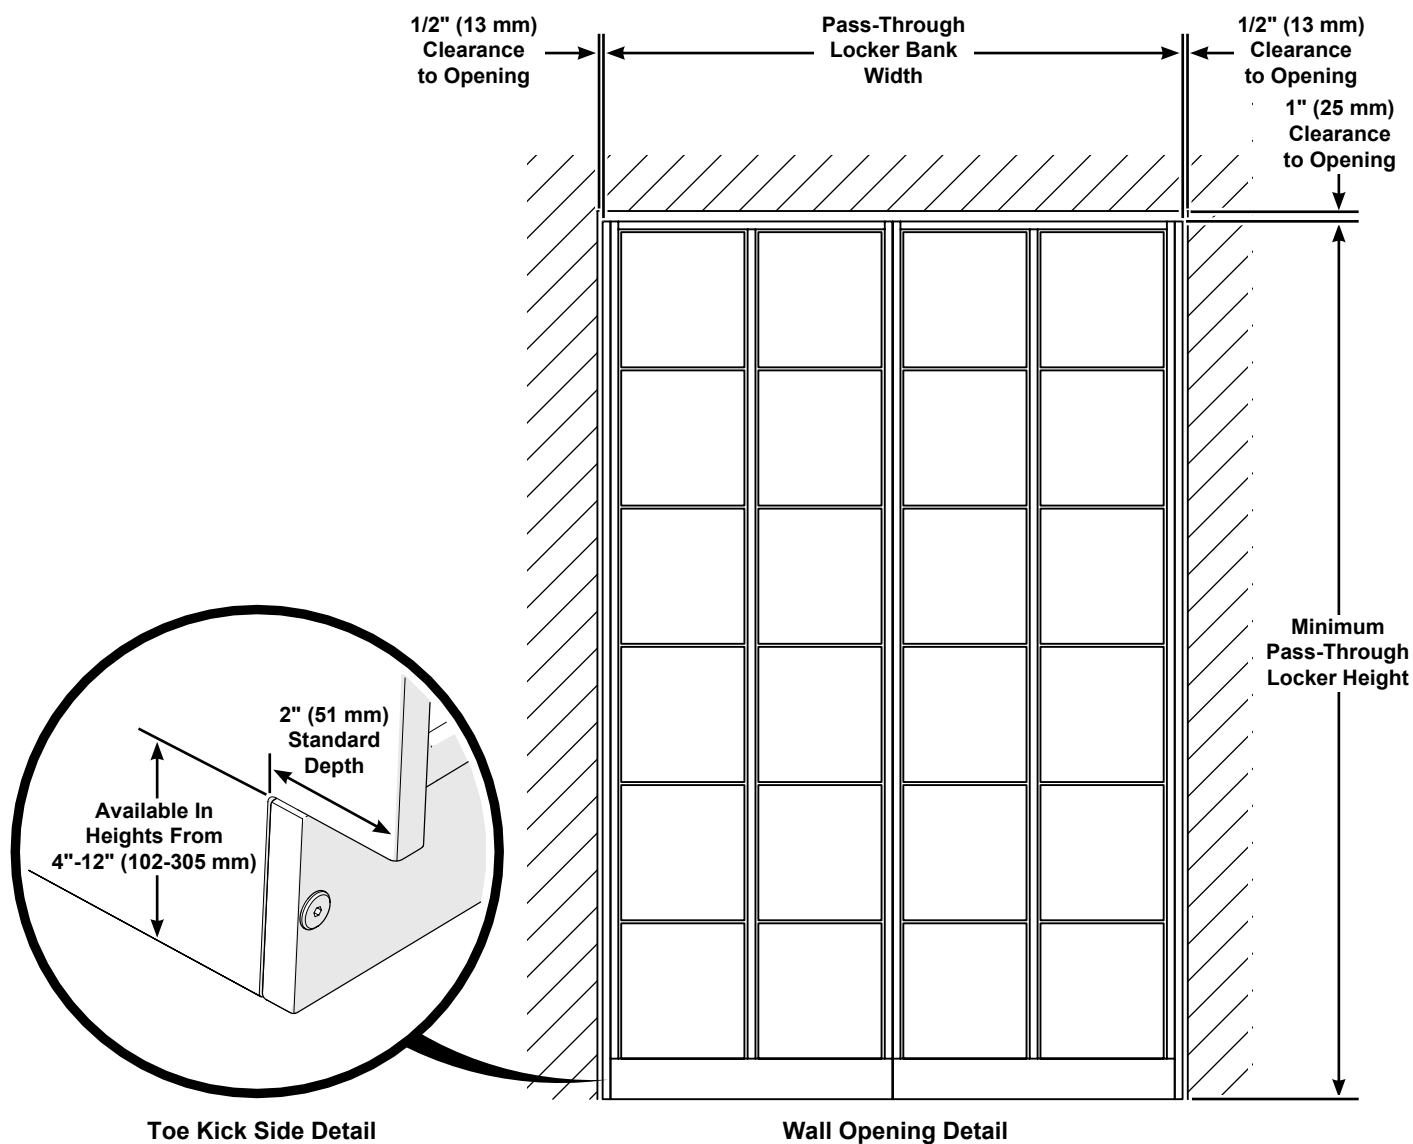

Wenger®

JRCLANCY

GEARBOSS®



© 2020 Wenger Corporation
USA/2020-02

MUSIC EDUCATION AND PERFORMING ARTS

Owatonna Office: Phone 800.4WENGER (493-6437) Worldwide +1.507.455.4100 | Parts & Service 800.887.7145 | wengercorp.com
555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

Syracuse Office: Phone 800.836.1885 Worldwide +1.315.451.3440 | jrclancy.com | 7041 Interstate Island Road | Syracuse | NY 13209-9713

ATHLETICS Phone 800.493.6437 | email gearboss@wengercorp.com | gearboss.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448