

# Truss Bar and Garment Bars for GearBoss® X-Cart™ and Team Cart™


**Basic Instructions only!**  
For more detailed product information, refer to the  
**GearBoss High-Density Storage System Owner's Manual 240A099.**

**⚠ CAUTION**


*Make sure anyone assembling, installing or using this product has read and understands these instructions.*

**⚠ CAUTION**


*Failure to comply with Warnings and Cautions in this document or on the equipment can result in damage to property or serious injury.*

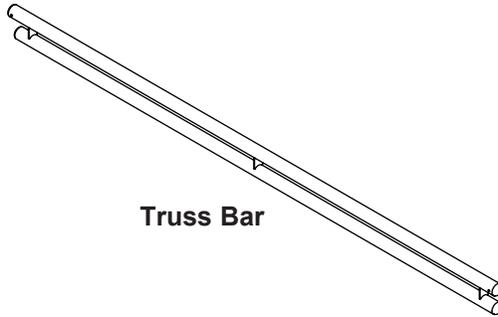

Truss Bar

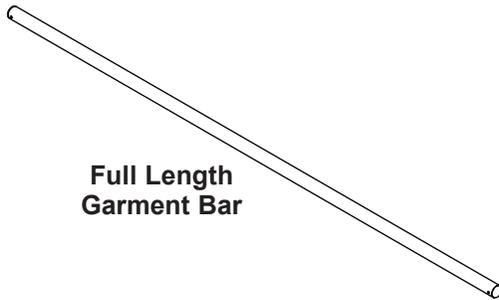

Full Length  
Garment Bar



Half Length  
Garment Bar

## Contents

Truss Bar Installation . . . . . 2	Replacement Parts . . . . . 4
Garment Bar Installation . . . . . 3	



Visit the GearBoss High-Density Storage System web page at [gearboss.com](http://gearboss.com) for more information.

**Note:** Please read and understand these instructions before proceeding.  
**Note:** If you need additional information, contact Wenger Corporation using the information below.

# Truss Bar Installation


## CAUTION

Maximum load capacity rating for the truss bar is 200 lb (91 kg).


1. Attach an accessory hanger bracket to each end frame wire-grille end panel.
  - a. Place the accessory hanger bracket hooks onto the wire-grille end panel horizontal wires.
  - b. Make sure that both accessory hanger brackets are at the same height and equally spaced horizontally from the edge of the cart.

## NOTICE


The truss hanger bar must be installed with the shorter bar on the bottom.

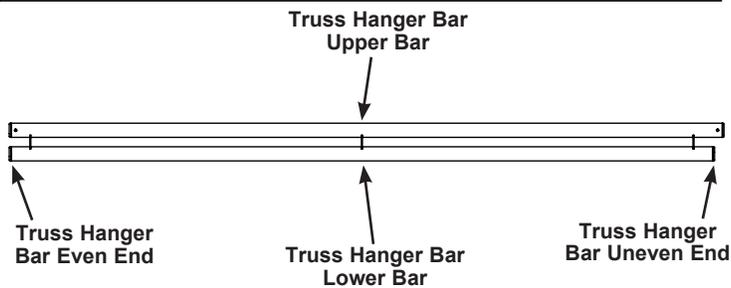


Accessory hanger hooks onto wire-grille end panel horizontal wire  
Wire-grille End Panel  
Accessory Hanger Bracket

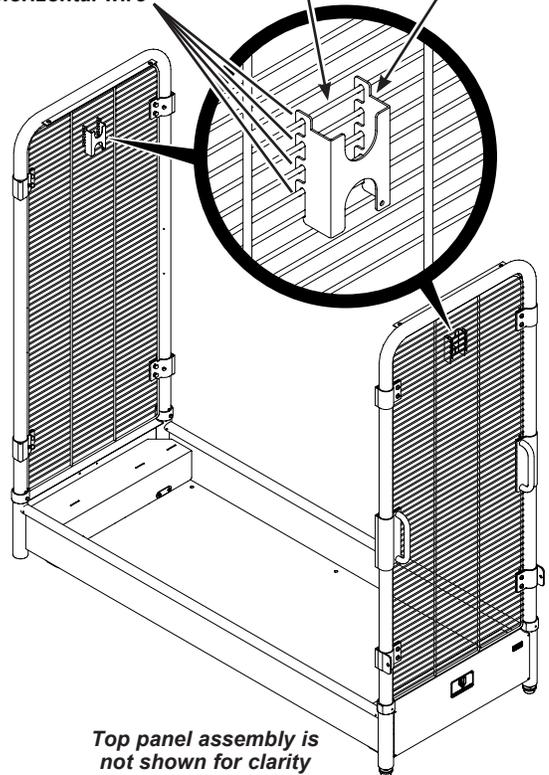

2. Insert the even end of the truss hanger bar into one accessory hanger bracket.

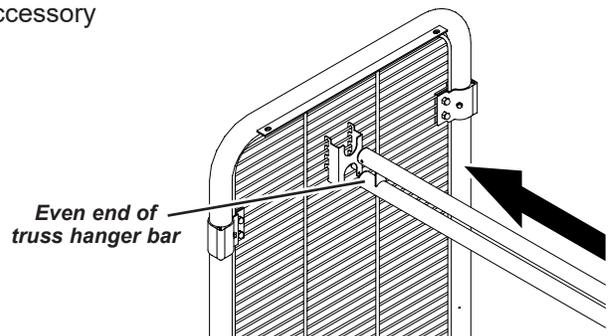

3. Lower the uneven end of the truss hanger bar into the upper pocket of the other accessory hanger bracket.

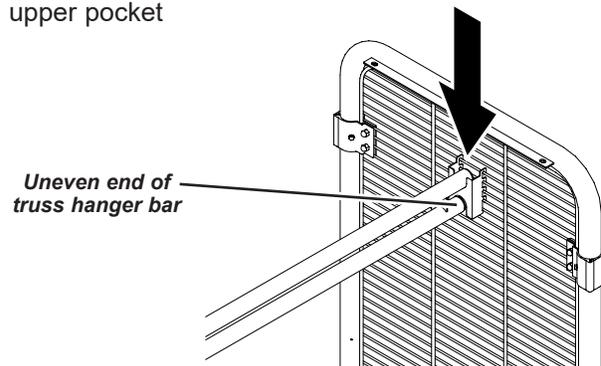


# Garment Bar Installation


## **CAUTION**

**Maximum load capacity rating for both the full and half length garment bars is 150 lb (68 kg).**

1. Attach two accessory hanger brackets.
  - If attaching the **full length garment bar**, attach an accessory hanger bracket to each end frame wire-grille end panel.
  - If attaching the **half length garment bar**, attach one accessory hanger bracket to an end frame wire-grille end panel and the other to the already installed cart divider.
  - a. Place the accessory hanger bracket hooks onto the grille horizontal wires.
  - b. Make sure that both accessory hanger brackets are at the same height and equally spaced horizontally from the edge of the cart.

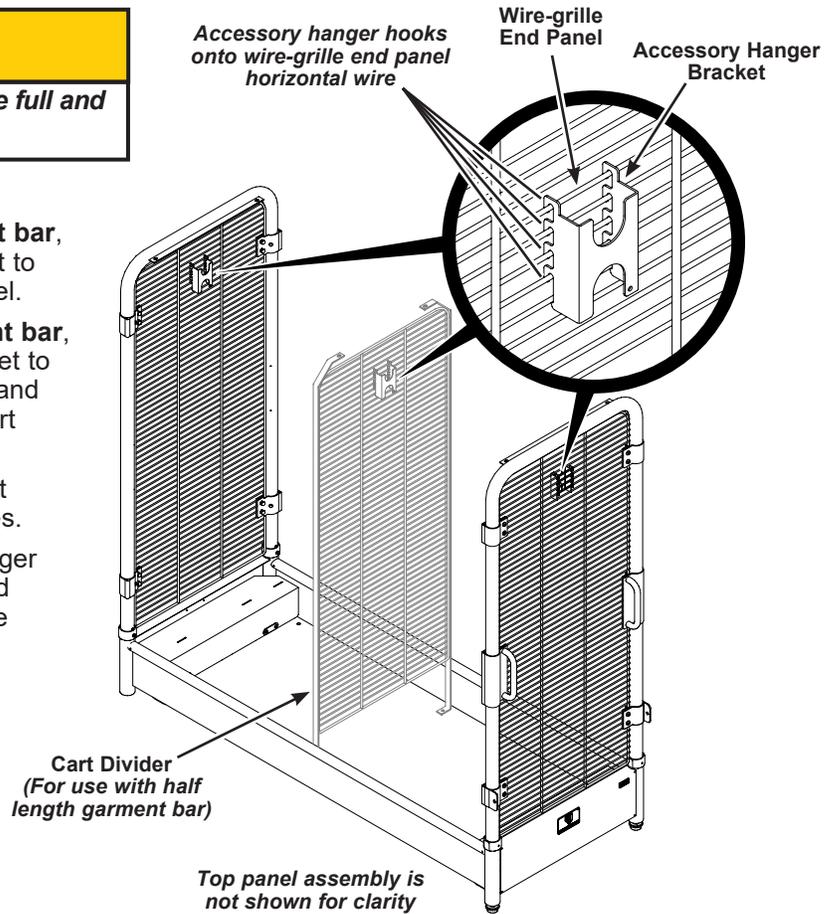


2. Place an end of the garment bar into each accessory hanger bracket upper pocket.

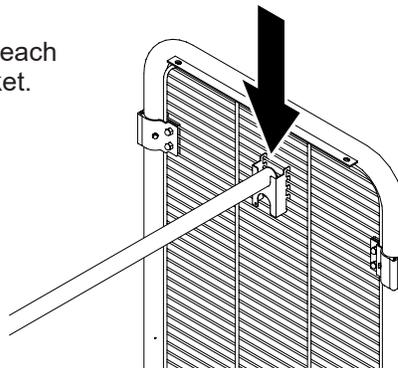

# Replacement Parts List


## Truss Bar Accessory

Item	Qty	Description
1	1	Truss Hanger Bar
2	4	End Plug
3	2	Accessory Hanger Bracket

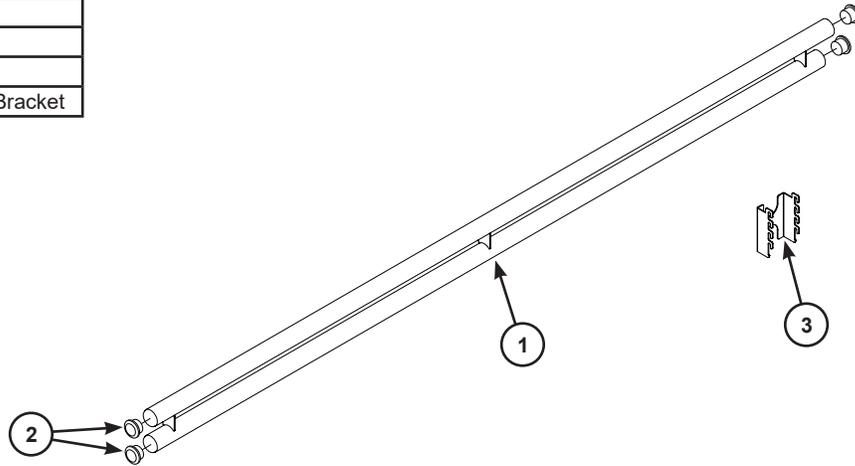

## Full Length Garment Bar Accessory

Item	Qty	Description
1	1	Full Length Garment Hanger Bar
2	2	End Plug
3	2	Accessory Hanger Bracket

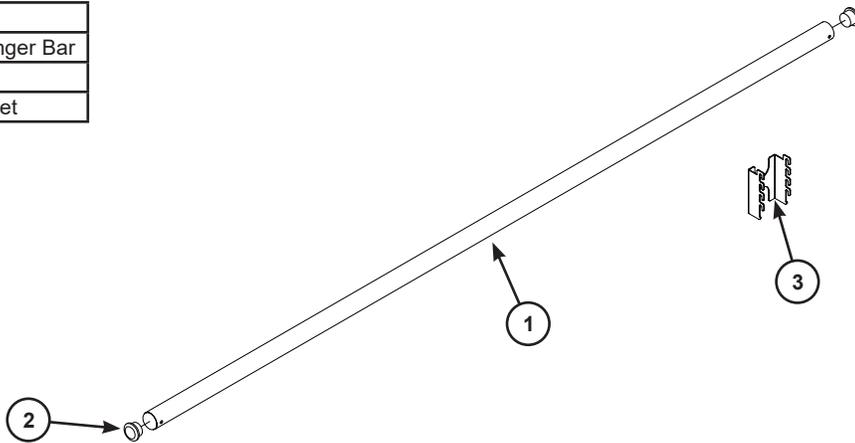

## Half Length Garment Bar Accessory

Item	Qty	Description
1	1	Half Length Garment Hanger Bar
2	2	End Plug
3	2	Accessory Hanger Bracket

