

Chain & Trim Chain - Grade 30

Grade 30 Chain

- Grade 30 Proof coil chain for dead hanging.
- Zinc plated.
- Manufactured to Federal Specification RRC-271-E.
- Working loading limit based on the manufacturer's 4:1 safety factor.



Grade 30 Trim Chain

- Most popular and economical lift line termination.
- 36" (914 mm) long, 1/4" (6 mm) Grade 30 proof coil chain, with a forged round pin anchor shackle, and thimble.
- The chain is wrapped one and one half turns around the batten and attached back to the thimble at the end of the lift line with a forged shackle. Adjustment is made by connecting the shackle into a link along the return side of the chain.



Chain 022-250

Dimensions

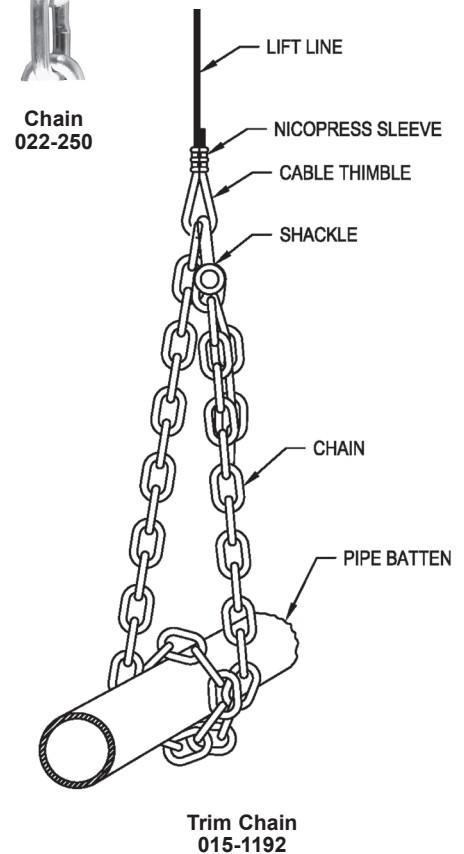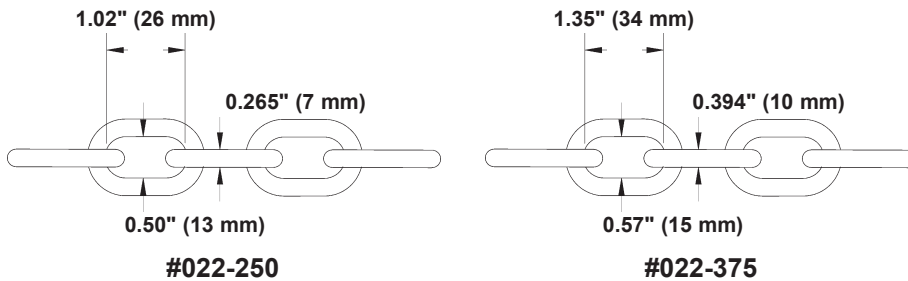

Order Information

Number	Description	RWL	Weight
022-250	1/4" (6 mm) Proof Coil Chain	1250 lbs. (567 kg)	0.7 lb./ft. (0.32 kg/m)
022-375	3/8" (9.5 mm) Proof Coil Chain	2650 lbs. (1202 kg)	1.5 lbs./ft. (0.68 kg/m)
015-1191	Trim Chain with 5/16" (8 mm) Shackle, 1/4" Thimble (6 mm)	750 lbs. (340 kg)	2 lbs. (0.9 kg)
015-1192	Trim Chain with 1/4" (6 mm) Shackle, 1/4" Thimble (6 mm)	750 lbs. (340 kg)	2 lbs. (0.9 kg)
015-1193	Trim Chain with 1/4" (6 mm) Shackle, 3/16" Thimble (5 mm)	750 lbs. (340 kg)	2 lbs. (0.9 kg)

RWL: RWL is maximum load that can be applied to the trim chain which is in "like new" condition and has been properly installed, maintained, and operated.



© 2017 Wenger Corporation
USA/2017-12/W

