

# Fusible Links

## Electro Thermal Link


- Used to connect the fire curtain system to fire alarms or other electrical systems.
- Link separates when electricity is applied.
- UL Listed.

## Rate of Rise Detector

- Used to release fire curtain when:
  - Temperature raises 15°F (7.1°C) in one minute.
  - Temperature exceeds 135°F (57.2°C).
- Normally open contact.
- UL Listed.

## Fusible Link

- Placed in the fire line to release the fire curtain.
- Link separates at a temperature of 165°F (74°C).
- UL Listed.


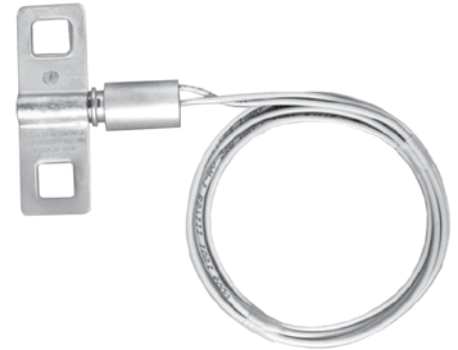


Electro Thermal Link  
016-ETL



Rate of Rise Detector  
099-5601B

## Dimensions

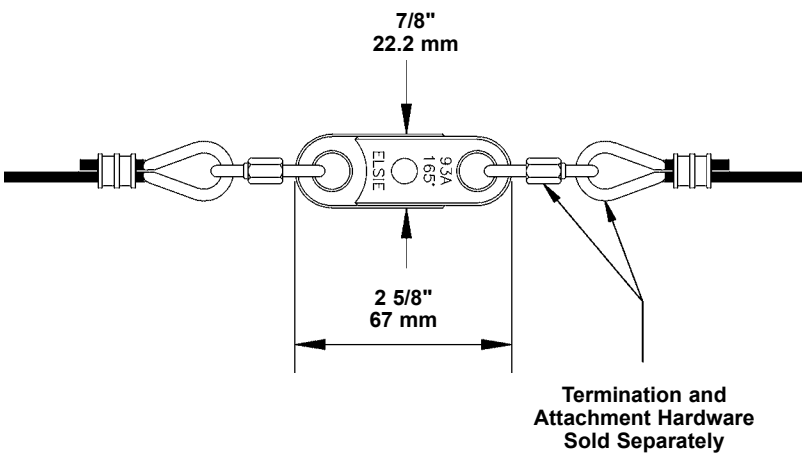

Fusible Link  
016-7519

## Order Information

Number	Description	RWL	Weight
016-ETL	Electro Thermal Link	40 lbs. (18.1 kg)	0.2 lbs. (0.09 kg)
099-5601B	Rate of Rise Detector	-	-
016-7519	Fusible Link	40 lbs. (18.1 kg)	0.2 lbs. (0.09 kg)



© 2018 Wenger Corporation  
USA/2018-08/W



WENGER CORPORATION Phone 800.4WENGER (493-6437) Worldwide +1.507.455.4100 | Parts & Service 800.887.7145 | Canada Office 800.268.0148 | wengercorp.com  
555 Park Drive, PO Box 448 | Owatonna MN 55060-0448

JR CLANCY Phone 800.836.1885 Worldwide +1.315.451.3440 | jrclancy.com | 7041 Interstate Island Road | Syracuse NY 13209-9713

GEARBOSS Phone 800.493.6437 | email gearboss@wengercorp.com | gearboss.com | 555 Park Drive, PO Box 448 | Owatonna MN 55060-0448