
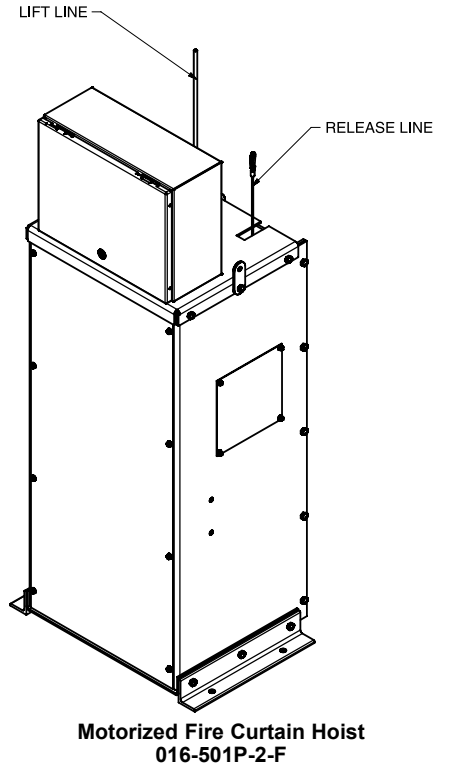


# Motorized Fire Curtain Hoist

- Motorized fire curtain hoist with integral speed regulation used to raise and lower fire curtains - up to 1,100 lbs. (499 kg).  
**Note:** Hoist is designed for constant load between 500 lbs. (227 kg) and 1,100 lbs. (499 kg).  
 Brail curtains may require additional pipe weight to operate properly.
- Max travel: Up to 30 ft. (9144 mm)
- Push button control stations for easy operation.
- Emergency lowering speed controlled by hydraulic speed regulator.
- 75' (22.9 m) of 5/16" (7.9 mm) of drive line included.
- Meets requirements of ANSI E1.22 – 2016 "Entertainment Technology Fire Safety Curtain Systems" or NFPA 80 "Standard for Fire Doors and Other Opening Protectives – 2016".
- Control Station included.
- Available for operation on 208, 230, or 460 VAC 3 phase power.  
 Please confirm voltage at time of ordering.

## Dimensions

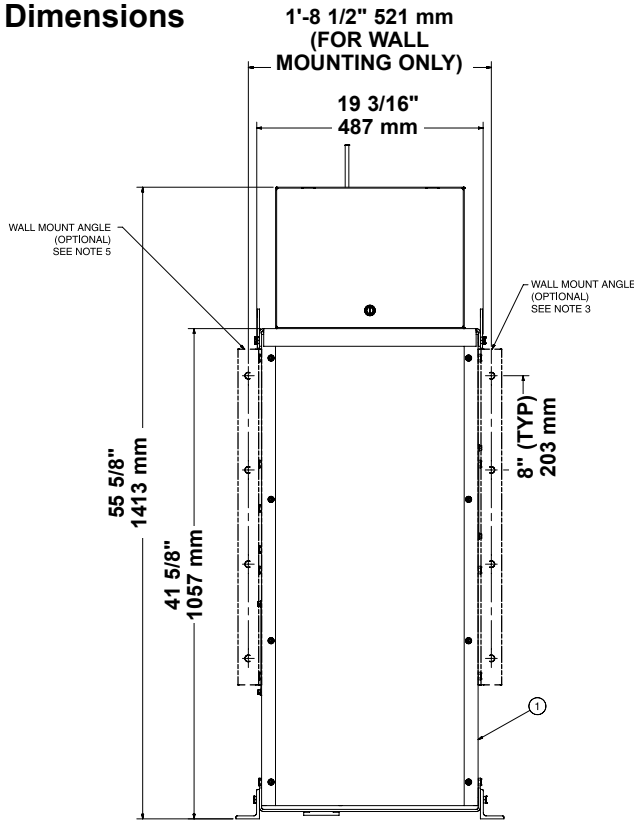

## Order Information

Number	Description	Capacity	Weight
016-501P-2-F	Motorized Fire Curtain Hoist 208V, Floor Mount	1100 lbs.(499 kg)	550 lbs.(249 kg)
016-501P-2-W	Motorized Fire Curtain Hoist 208V, Wall Mount	1100 lbs.(499 kg)	550 lbs.(249 kg)
016-501P-3-F	Motorized Fire Curtain Hoist 380V, Floor Mount	1100 lbs.(499 kg)	550 lbs.(249 kg)
016-501P-3-W	Motorized Fire Curtain Hoist 380V, Wall Mount	1100 lbs.(499 kg)	550 lbs.(249 kg)
016-501P-4-F	Motorized Fire Curtain Hoist 480V, Floor Mount	1100 lbs.(499 kg)	550 lbs.(249 kg)
016-501P-4-W	Motorized Fire Curtain Hoist 480V, Wall Mount	1100 lbs.(499 kg)	550 lbs.(249 kg)



© 2018 Wenger Corporation  
USA/2018-05/W



**WENGER CORPORATION** Phone 800.4WENGER (493-6437) Worldwide +1.507.455.4100 | Parts & Service 800.887.7145 | Canada Office 800.268.0148 | wengercorp.com  
555 Park Drive, PO Box 448 | Owatonna MN 55060-0448

**JR CLANCY** Phone 800.836.1885 Worldwide +1.315.451.3440 | jrclancy.com | 7041 Interstate Island Road | Syracuse NY 13209-9713

**GEARBOSS** Phone 800.493.6437 | email gearboss@wengercorp.com | gearboss.com | 555 Park Drive, PO Box 448 | Owatonna MN 55060-0448