

SureLock[®] Rope Lock

- Will not open if the set is more than 50 lb (22.6 kg) out of balance, reducing the risk of rigging "runaways".
- Indicates if the set is balanced, batten heavy, or arbor heavy.
- One piece ASTM A536 ductile iron body.
- 10" (254 mm) handle, powder-coated ductile iron, contoured for comfort and ease of use.
- Two iron cams grip rope with socket head adjustment screw for 5/8"-1" (15.875-25.4 mm) rope. Adjustment screw has a nylon tip for quiet operation.
- Integral ears for optional padlock.
- Vinyl coated steel oval locking ring.
- May be used on 6" (152 mm) centers or more.
- For use in new projects or as an upgrade to existing rigging systems.
- Rubber bumper to quiet handle when it is opened.


Please Note:

Rope locks are not designed to hold an imbalance of more than 50 lb (22.6 kg), nor to be used as a speed control.



**SureLock
010-600R
US Patent 7,165,295**

Dimensions

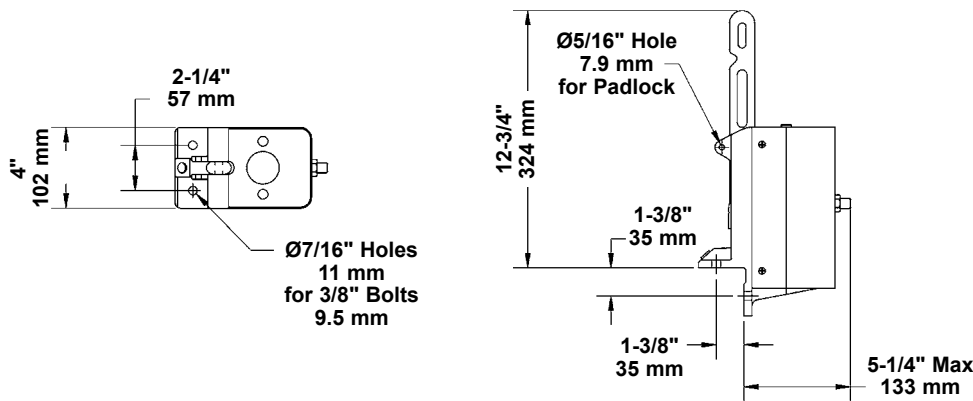

Order Information

Number	Description	RWL	Weight
010-600R	SureLock	50 lb (22.6 kg)	20 lb (3.6 kg)
010-PLOCK	Padlock for Rope Lock	—	1 lb. (0.45 kg)
010-533C	Replacement Oval Ring, Vinyl Coated	—	0.1 lb. (0.04 kg)

RWL: RWL is maximum load that can be applied to the rope lock which is in "like new" condition and has been properly installed, maintained, and operated.



© 2018 Wenger Corporation
USA/2018-09/W

