


T-Bar Guide Systems

- Used to guide counterweight arbors.
- 6" (152 mm) and 8" (203 mm) centers are standard, other centers are available.
- T-Bar systems supplied complete with required T-Bar, steel wall batten angles, stop battens, splice bars, U-clips, adjustable wall knees, bolts, nuts, and washers.
- Adjustable wall knees allow simple, on site adjustment to meet field conditions.
- Vertical T's are pre-punched 1-1/2" x 1-1/2" x 3/16" (38 mm x 38 mm x 5 mm) steel members.
- Horizontal wall battens & stop battens are pre-punched 1-3/4" x 1-3/4" x 3/16" (44.5 mm x 44.5 mm x 5 mm) steel angle.
- Optional 2" x 2" (50.8 mm x 50.8 mm) hardwood or hardwood with neoprene bumpers are available for stop battens.



T-Bar Guide System
012-1500

Dimensions

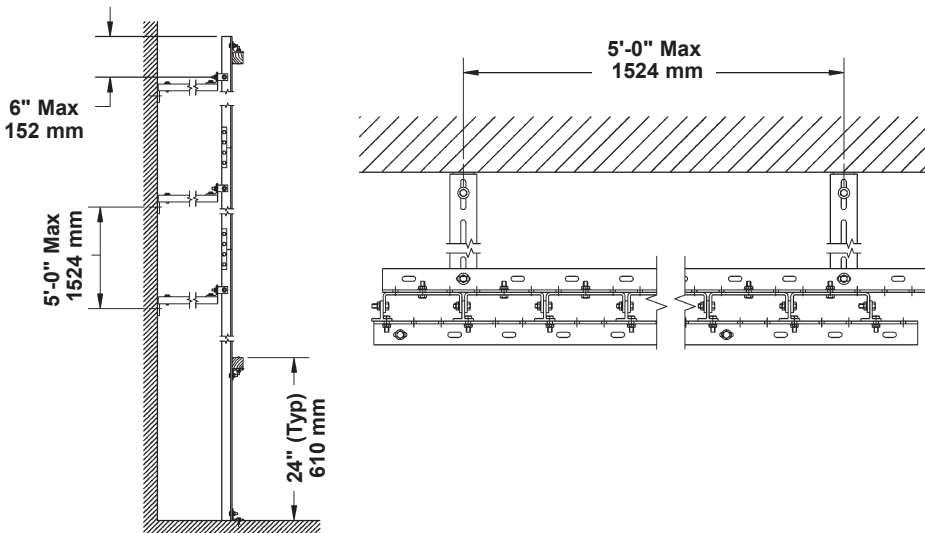

Order Information

Guide systems are ordered in linear feet of guide required (number of runs of T x height of guide).

Number	Description	Weight
012-1500	T-Bar Guide System	4 lbs./ft. (5.9 kg/m)
112-1H	2" x 2" (51 mm x 51 mm) Hardwood stop batten	3 lbs./ft. (4.46 kg/m)
112-1N	2" x 2" (51 mm x 51 mm) Hardwood stop batten with 1/4" (6 mm) Neoprene	4 lbs./ft. (5.9 kg/m)



© 2017 Wenger Corporation
USA/2017-12/W

