

Chain

Grade 30 Chain

- Grade 30 proof coil chain for dead hanging
- Zinc plated
- Manufactured to Federal Specification RRC-271-E
- Working loading limit based on the manufacturer's 4:1 safety factor

AlphaChain™




- 7 mm (0.275") black alloy chain for rigging
- Black chain eliminates glare and reflection
- Grade 63 hardened alloy chain meeting OSHA requirements for sling usage OSHA 1910.184(e)(5)
- Used with standard 1/4" (6 mm) hardware
- Marked with JRC on every link
- Date code on every 10th link for traceability
- 3,250 lb (1,474 kg) working loading limit based on the manufacturer's 4:1 safety factor

Three-year warranty against defects in materials or workmanship is provided on all J.R. Clancy equipment, additional warranty information is available at jrclancy.com



Chain

Dimensions

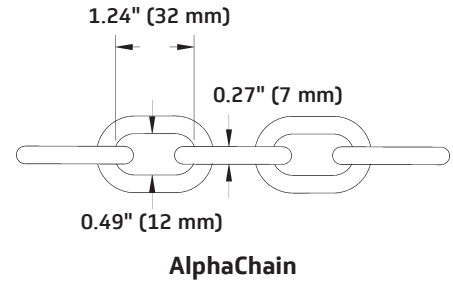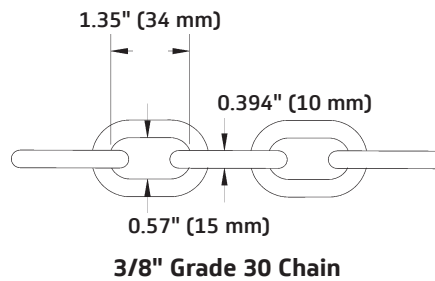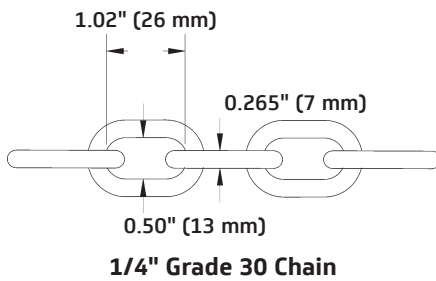

Order Information

Number	Description	RWL	Weight
022-250	1/4" (6 mm) Proof Coil Chain	1250 lb (567 kg)	0.7 lb/ft (0.32 kg/m)
022-375	3/8" (10 mm) Proof Coil Chain	2650 lb (1202 kg)	1.5 lb/ft (0.68 kg/m)
022-250TC	AlphaChain 7 mm (0.275") Grade 63 Alloy Chain	3250 lb (1474 kg)	0.7 lb (0.32 kg)

RWL: RWL is maximum load that can be applied to the trim chain which is in "like new" condition and has been properly installed, maintained, and operated.

