



J.R. CLANCY HOIST SOLUTIONS



POWER
ASSIST®



VARION®
HOIST



SUMMIT
THEATRON™



POWER
LIFT®



TITAN®
HOIST

HOIST COMPARISON

USAGE

MODEL SPEED / CAPACITY

TRAVEL

OF LIFT LINES

WIRE ROPE DIAMETER

LOAD SENSING

ENCODER


MAX. BATTEN LENGTH*

MINIMUM SET SPACING (CENTER TO CENTER)

STEEL SPACING


INTEGRATED BACKBONE

MOUNTING OPTIONS

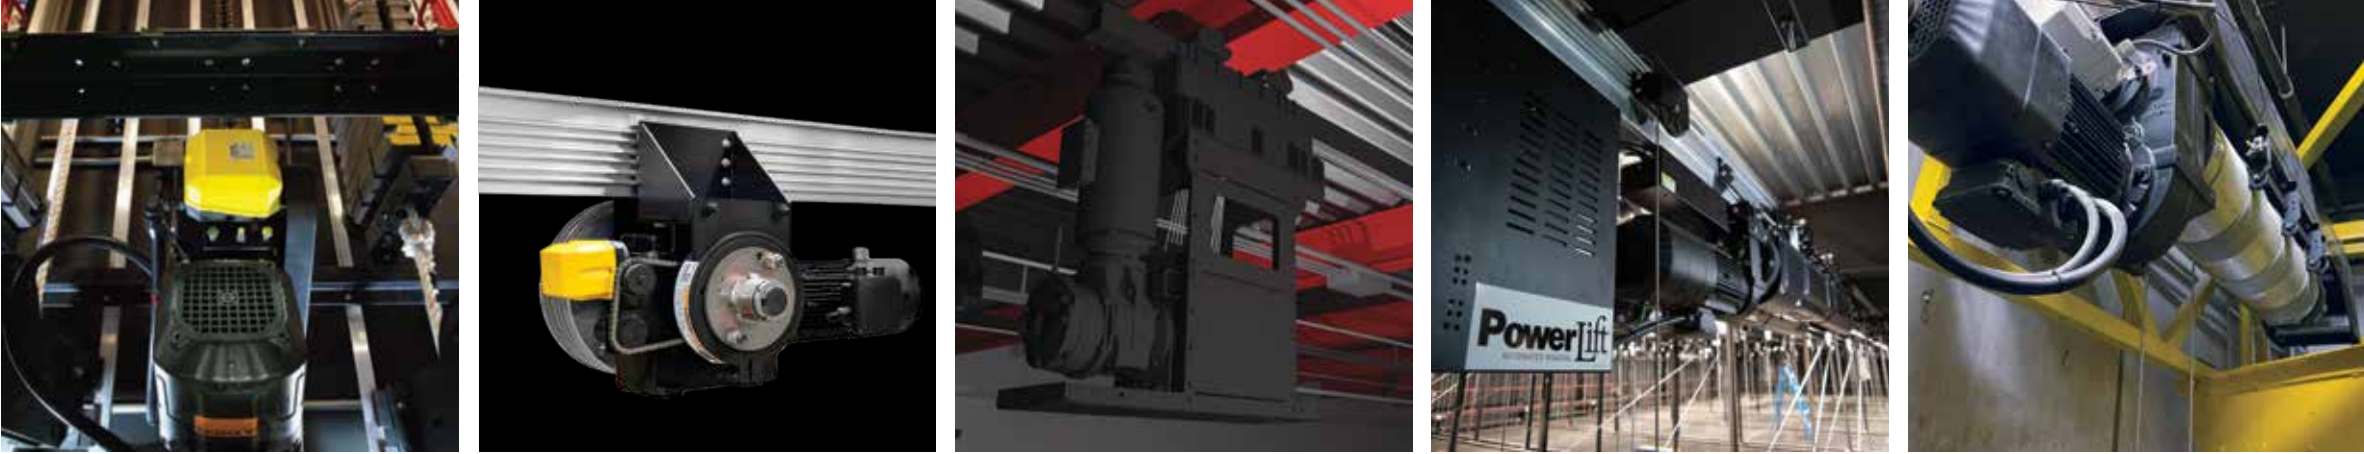

POWERASSIST®	VARION®	SUMMIT Theatron™	POWERLIFT®	TITAN®
■ Convert your manual rigging sets to an automated system	■ Ideal for electrics, curtains, drops or front-of-house stage lighting or speakers	■ Ideal for high school and university theatres, perfect for stage electrics and shells	■ Ideal for many stage hoisting applications including lighting, scenery and shell ceilings	■ Ideal for demanding stage hoisting applications including house curtains, lighting, scenery and shell ceilings.
■ 25 ft/min / 2000 lb (0.13 m/s / 907 kg) ■ (Single or double purchase)	■ 15 ft/min / 1500 lb (0.08 m/s / 680 kg)	■ 0-30 ft/min / 2200 lb (0-0.15 m/s / 998 kg) ■ 0-205 ft/min / 1500 lb (0-1.0 m/s / 680 kg)	■ 20 ft/min / 2500 lb (0.1 m/s / 1134 kg) ■ 0-20 ft/min / 2500 lb (0-0.1 m/s / 1134 kg) ■ 0-120 ft/min / 1200 lb (0-0.6 m/s / 544 kg) ■ 0-120 ft/min / 1750 lb(0-0.6 m/s / 793 kg) ■ 0-120 ft/min / 2500 lb (0-0.6 m/s / 1134 kg) ■ 0-180 ft/min / 1200 lb (0-0.9 m/s / 544 kg) ■ 0-180 ft/min / 1750 lb (0-0.9 m/s / 793 kg)	■ 20 ft/min / 2400 lb (0.1 m/s / 1089 kg) ■ 20 ft/min / 3300 lb (0.1 m/s / 1497 kg) ■ 0-200 ft/min / 2200 lb (1.0 m/s / 998 kg) ■ 0-200 ft/min / 3000 lb (1.0 m/s / 1361 kg) ■ 0-260 ft/min / 3300 lb (1.3 m/s / 1497 kg) ■ 0-340 ft/min / 1300 lb (1.7 m/s / 590 kg) ■ 0-340 ft/min / 1750 lb (1.7 m/s / 794 kg) ■ 0-400 ft/min / 2200 lb (2.0 m/s / 998 kg) ■ 0-650 ft/min / 1400 lb (3.3 m/s / 635 kg)
■ Unlimited. Varies based on building	■ Up to 50' (15.2 m)	■ 55' (16.8 m)	■ Up to 7 Lines @ 62' (18.9 m) ■ Up to 8 Lines @ 49' (14.9 m)	■ Up to 8 lines @ 90' (27.4 m) ■ Up to 10 lines @ 67' (20.4m)
■ N/A	■ Up to 5 lines	■ Up to 8 lines	■ Up to 8 lines	■ Up to 10 lines
■ N/A	■ 3/16" (4.8 mm)	■ 3/16" (4.8 mm)	■ 3/16" (4.8 m)	■ 1/4" (6.3 mm)
■ No	■ Overload Protection	■ Yes	■ Yes	■ Optional
■ Optional	■ Optional	■ Absolute Encoder Standard	■ Standard ■ Optional Absolute Upgrade	■ Standard
■ As required	■ 45' (13.7 m)	■ 76' (23.2 m)	■ 76' (23.2 m)	■ 96' (29.3 m)
■ 6" (152 mm) Adjacent to manual sets	■ 21" (533 mm) In-line ■ 10" (254 mm) Offset	■ 16" (406 mm) in-line ■ 8" (203 mm) offset	■ 11" (279 mm) In-line ■ 8" (203 mm) Offset	■ 14" (356 mm) In-line ■ 8" (203mm) Offset
■ As required	■ Up to 15' (4.57 m)	■ Up to 12' (3.66 m)	■ Up to 12' (3.66 m)	■ Up to 12' (3.66 m)
■ N/A	■ Optional	■ Optional	■ Optional	■ N/A
■ N/A	■ Optional	■ Under-hung	■ Under-hung, vertical or upright	■ N/A

* Assumes 1.5" (38 mm) schedule 40 pipe batten with 10' (3 m) lift line spacing and 3' (0.9 m) of overhang on each side.

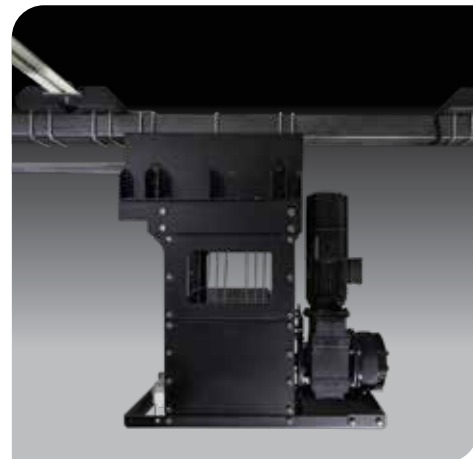

Wenger®

C O R P O R A T I O N

© 2025 Wenger Corporation
USA/6-25/D/W/LT0229D



MINNESOTA LOCATION

Wenger Phone 800.4WENGER (493-6437) | Worldwide +1.507.455.4100 | Parts & Service 800.887.7145 | wengercorp.com
555 Park Drive, PO Box 448 | Owatonna | MN 55060

GearBoss Phone 800.493.6437 | gearboss.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060

NEW YORK LOCATION

J.R. Clancy Phone 800.836.1885 | Worldwide +1.315.451.3440 | jrclancy.com | 7041 Interstate Island Road | Syracuse | NY 13209

RHODE ISLAND LOCATION

Creative Connors Phone 401.289.2942 | Sales & Rentals-press 1 | Tech Support-press 2 | creativeconnors.com | 20 Avery Rd Cranston | RI 02910

BRANDS OF WENGER CORPORATION

Wenger®

JRCLANCY



GEARBOSSTM

creative connors

FOLLOW US ON SOCIAL MEDIA



Music Education



Performing Arts



Athletics



Make it Move™