


Locking Rails - Gallery Mounted

- Locking rails support rope locks and the index cards used to identify sets
- Rope locks and index cards are mounted on a 3" x 5" x 1/4" (76 mm x 127 mm x 6 mm) formed, pre-punched steel angle
- Built to withstand a 500 lb per linear foot (744.5 kg/m) up load (RWL)
- Numbered index cards with a safety warning are included; these can be written on using erasable marker or grease pencil
- Mounts to the edge of a counterweight pit or gallery; mounting method must be able to withstand the imposed load
- Mounting stanchions are located on 5' (1524 mm) (maximum) centers and made from 2" x 2" x 1/4" (51 mm x 51 mm x 6 mm) steel tube
- Wire mesh keeps objects from being knocked off edge of gallery
- Three-year warranty against defects in materials or workmanship is provided on all J.R. Clancy equipment, additional warranty information is available at jrclancy.com



Gallery Mounted Locking Rail
011-558R6

Dimensions

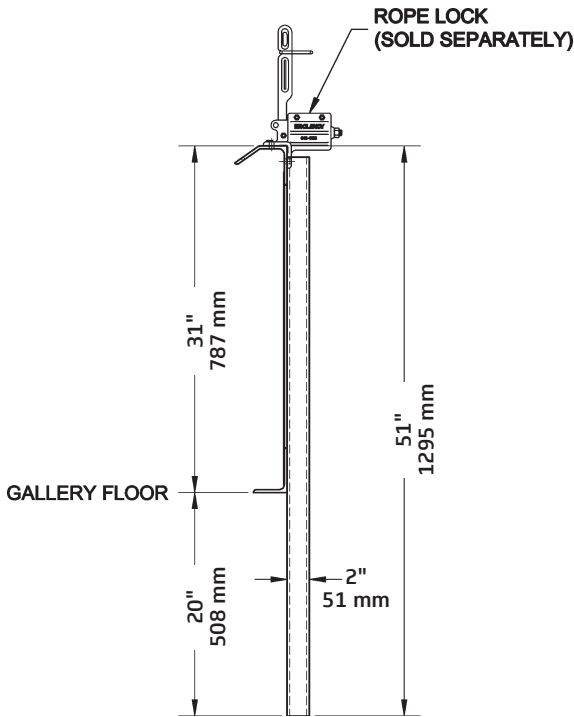

Order Information

Number	Set Centers	Weight
011-558R6	6" (152 mm)	20 lb (9 kg)
011-558R8	8" (203 mm)	20 lb (9 kg)

RWL: RWL is maximum load that can be applied to the locking rail which is in "like new" condition and has been properly installed, maintained, and operated.

