

Pass-Through Cubby Lockers

[TECHNICAL
SHEET]



GearBoss® Pass-Through Cubby Lockers

Wenger custom casework solutions bring a higher level of function and aesthetics to athletic spaces. From lockers to pass-through laundry cubbies, Wenger will customize casework to enhance your designs.

Intended Use

- The GearBoss Pass-Through Cubby Lockers are intended to maximize storage density in areas where there is storage need and space limitations.
- The GearBoss Pass-Through Cubby Lockers are intended for indoor use in normal ambient temperature and humidity conditions - components must not be exposed to prolonged outside weather conditions.

Specifications

- Variety of styles tailored to different storage needs.
- Available in total cabinet heights from 15" to 95" (381 to 2413 mm).
- Cubby sizing:

Cubby rows	One to seven rows available (depending on cabinet height)					
Cubby widths	6" (152 mm)	8" (203 mm)	9-3/8" (238 mm)	12-3/8" (314 mm)	19-1/2" (495 mm)	25-1/2" (648 mm)


- Wall panels are 3/4" (19 mm) thick industrial grade composite wood with no added formaldehyde and polyester laminate finish in Wenger standard colors.
- Edging is 1/8" (3 mm) radiused PVC.
- Patented shelves are blow-molded polyethylene mounted with self-lock shelf supports.
- Grooved shelves allow air to circulate around items being stored.
- Ventilation holes in casework for circulation help dissipate moisture and aid air circulation.
- Door options:
 - Wood doors - same construction as wall panels.
 - No door.
- Door lock options:
 - Programmable digital lock.
 - Locking slide bolt with strike plate designed for padlocks with 3/4" (19 mm) maximum vertical shackle clearance.
- Doors include heavy-duty 5-knuckle institutional ANSI/BHMA A156.9, Grade 1 hinge, through - bolted to cabinet wall.
- UL GREENGUARD Certified - Product certified for low chemical emissions: ul.com/gg - UL 2818.
- Environmental attributes and LEED compliance for this product can be found at www.wengercorp.com/GREEN or by contacting your Wenger representative.
- Ten-year warranty.



Installation Requirements on following page.

Installation Requirements

- Verification of building dimensions to be confirmed by general contractor prior to construction.
Product is prefabricated in standard sizes.
- Wall opening(s) for pass thru lockers must be a minimum of 1" (25 mm) wider than the pass thru locker banks (including end cover panels when applicable) and a minimum of 1" (25 mm) taller than the pass thru locker minimum height. The wall opening size includes framing around the perimeter of the opening that will be used to shim/anchor the pass thru lockers horizontally and vertically.
Wall opening(s) and framing must be complete prior to pass thru locker installation.
- Finish trim to be provided & installed by others.
- Wall/floor area specified for pass thru locker installation must be free of surface mounted obstructions such as light switches, outlets, hvac, pipes or conduit, window trim, clocks, signs, etc.
- End cover panels (at end of pass thru locker rows) and closure panels to be supplied as shown per drawing.
- Floor(s) must be cleared of debris or equipment prior to pass thru locker installation.
- Color combination to be selected.

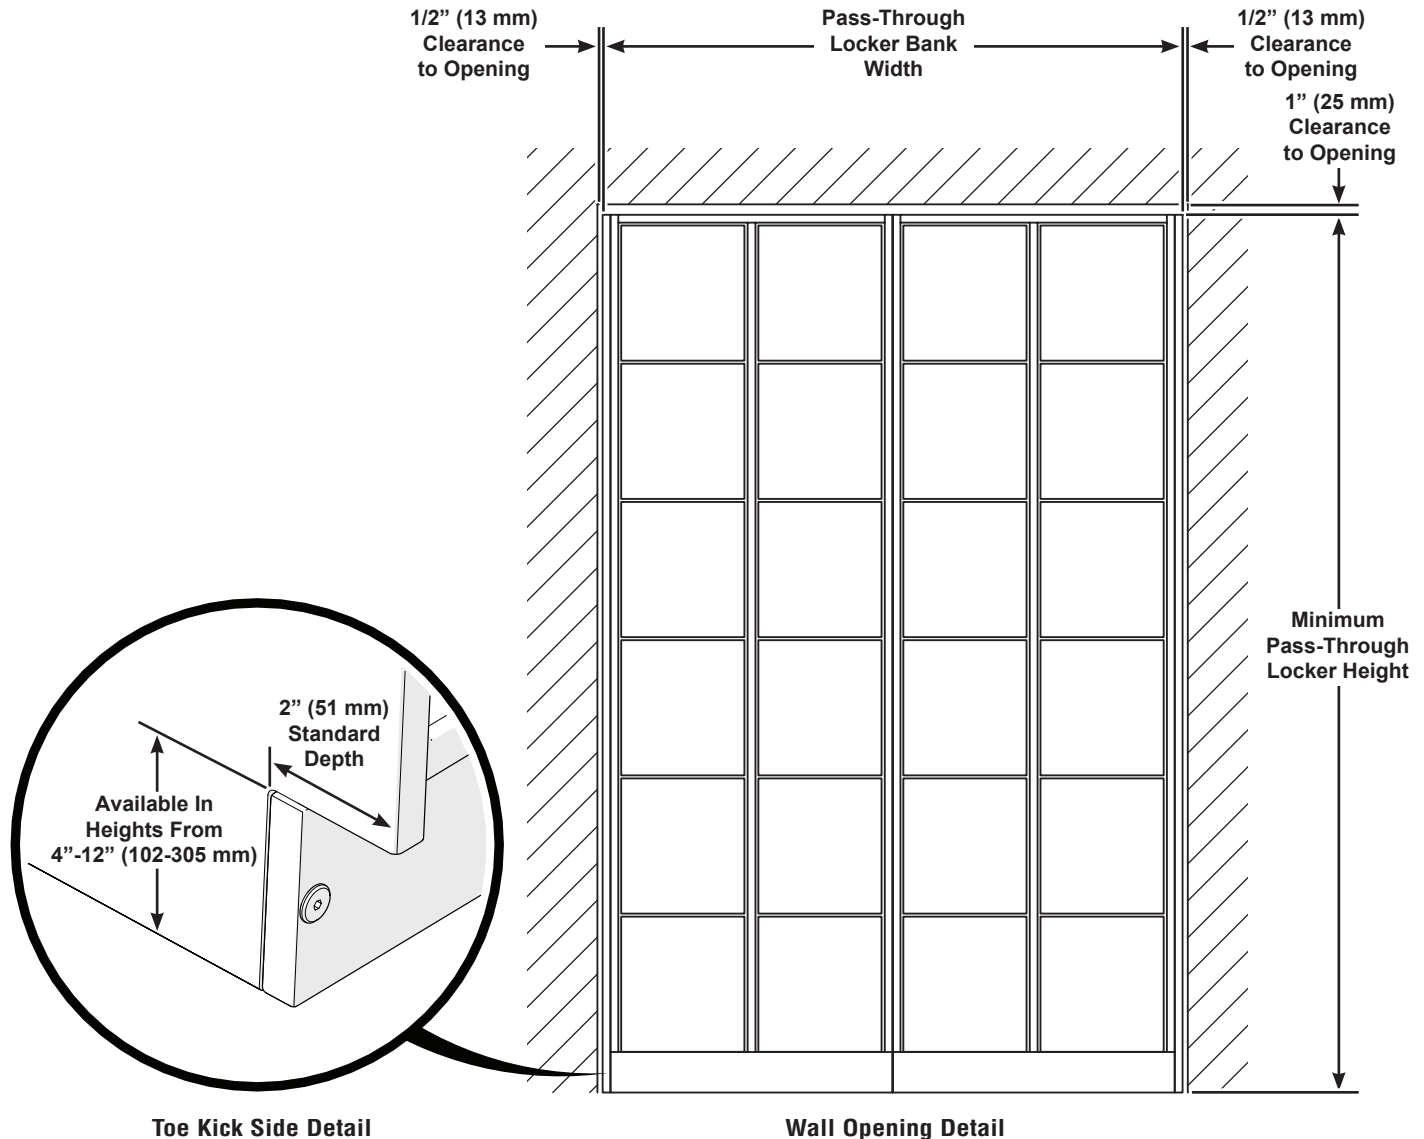

Wenger

JRCLANCY

GEARBOSS

© 2017 Wenger Corporation
USA/2017-12/W



WENGER CORPORATION

Phone 800.4WENGER (493-6437) Worldwide +1.507.455.4100 | Fax 507.455.4258 Worldwide +1.507.774.8576
Parts & Service 800.887.7145 | Canada Office 800.268.0148 | Web wengercorp.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

JR CLANCY

Phone 800.836.1885 Worldwide +1.315.451.3440 | Fax 877.836.1885 Worldwide +1.315.451.1766 | Web jrclancy.com
7041 Interstate Island Road | Syracuse | NY 13209-9713

GEARBOSS

Phone 800.493.6437 | email gearboss@wengercorp.com | Web gearboss.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448