# Lieto™ **RGBW LED Light Fixture**




CORPORATION


Lieto is an LED light fixture specifically designed for use in Wenger orchestra shells and is offered in RGBW. The shallow mechanical design fully encloses components and includes a powder-coat steel bezel to properly finish the shell ceiling appearance from below.

#### **Features**

- Designed for use in Wenger acoustical shell applications
- Aluminum fixture construction and shallow ABS housing are compact and lightweight
- Three axis beam positioning provides tool-less pan, tilt and rotation utilizing a face side adjustment mechanism
- High output CREE LED light engine 12,000 lumens produced @ 150 watt setting
- Quiet with no buzzing, detectable RFI or cooling fans
- NC-17 acoustical rating
- No IR heat or UV produced
- · Choice of 18, 25 and 34 degree beamspread options
- Choice of color temperature options 2700K, 3000K and 4000K
- Optional concentric ring louvre
- 1% DMX512 dimming, without visible stepping, flash or flicker
- RDM remote fixture address and status reporting
- USB download of performance and usage data
- Each fixture individually addressable and controllable and includes an integrated tilt switch
- · Fixtures are RDM compatible at all times including performance and storage position
- Compatible with DMX512 controlled UL924 emergency lighting solutions
- Energy efficient; wattage is firmware selectable
- Long life L70 > 70,000 hours
- MVOLT Compatible with 100 240 VAC 50 / 60 Hz electric service
- ETL and CE listed and labeled
- RoHS compliant and IP20 rated
- Includes safety cable lanyard
- Includes configuration tablet/firmware/USB Cable
- Five-year limited warranty
- Patent pending

# **Dimensions**

















# **Optical Performance**

Lieto IES files were created using a calibrated goniophotometer by a third party independent laboratory. Wenger Corporation can assist with photometric calculations and layout recommendations using Lighting Analysts AGI software. IES files can be requested from Wenger and are also available for download from www.wengercorp.com.


Ordering Code	Description	Lumens	LPW	Beam Angle (50%)	Field Angle (90%)
CLTO-150-18-30-RJ45-80-NL	18°, 150 watts, 3000K	8918	65.8	18	31
CLTO-150-25-30-RJ45-80-NL	25°, 150 watts, 3000K	8545	61.7	25	46
CLTO-150-34-30-RJ45-80-NL	34°, 150 watts, 3000K	8644	62.6	34	60

## **Ordering Information**

Ordering Code Example: CLTO-150-25-30-RJ45-90-NL

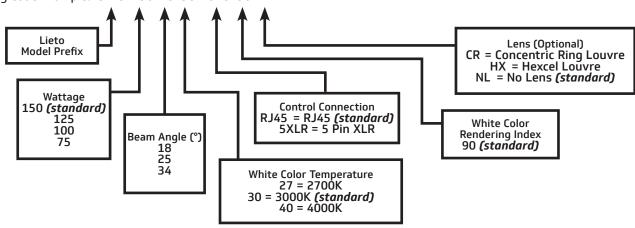

### **Accessories**



Concentric Ring Louvre 16% Lumen Reduction

### **Photometrics**

Filename: CLTO-150-18-30-RJ45-80-NL


Luminaire: Stage Light


Lamp Output: 1 lamp, rated Lumens/lamp: 8917.8 Max Candela: 74,084.0 at Horizontal: 0°, Vertical: 0°

Input Wattage: 135.6

Luminous Opening: Circular (Dia: 11.04")

Test Date: 2019-03-26 Test Lab: Intertek Photometry:T ype C CIE Class: Direct Cutoff Class: Cutoff Nema Type: 3 X 3





Filename: CLTO-150-25-30-RJ45-80-NL

Luminaire: Stage Light


Lamp Output: 1 lamp, rated Lumens/lamp: 8545.1 Max Candela: 35,779.7 at Horizontal: 0°, Vertical: 0°

Input Wattage: 138.5

Luminous Opening: Circular (Dia: 11.04")

Test Date: 2019-03-26 Test Lab: Intertek Photometry: Type C CIE Class: Direct Cutoff Class: Cutoff Nema Type: 3 X 3







Filename: CLTO-150-34-30-RJ45-80-NL


Luminaire: Stage Light

Lamp Output: 1 lamp, rated Lumens/lamp: 8643.9 Max Candela: 21,170.3 at Horizontal: 0°, Vertical: 0°


Input Wattage: 138.1

Luminous Opening: Circular (Dia: 11.04")

Test Date: 2019-03-27 Test Lab: Intertek/Aquarii Photometry: Type C CIE Class: Direct Cutoff Class: Cutoff Nema Type: 4 X 4











© 2024 Wenger Corporation USA/2024-03