Wender


Stagehand[®] Staging

CORPORATION


- Decks are available in 4' x 8' (1219 x 2438 mm) sizes in the following heights: 16" (406 mm) fixed height, 24" (610 mm) fixed height, 16"/24" (406/610 mm) dual height, and 24"/32" (610/813 mm) dual height
- Each deck is equipped with pneumatic springs to assist in setup and takedown, allowing one-person ease of use
- Decks are constructed of solid core 3/4" (19 mm) plywood; top surfaces available are: black slip resistant or grey carpet
- Legs are one-piece 16 gauge 1-1/4" (32 mm) steel tubing with a reinforcing cross brace
 - locking angle-braces allow for easy set-up and sure stability
 - legs have an electrostatically applied black epoxy paint finish
- · Frame and edging are fabricated from 16 gauge steel with a grey powder-coat painted finish
- Unit-to-unit frame clamps have a cam-action for easy positive locking to the frame of the adjacent unit: one clamp per side of each stage unit, provides two points of connection when units are locked together
- Units nest for compact storage; the first stagehand unit needs 27" (686 mm) and each additional unit only adds 12" (305 mm)
- When stored, units are 61-1/2"h (1562 mm) high and 96"w (2438 mm)
- Five-year warranty

Accessories Include:

- Two- or three-step stairways include attached handrails for safety and non-slip step treads; steps measure 39"w (991 mm) by 11"d (279 mm), black finish
- Guardrails comply with most building code requirements for loading; quardrails are 42" (1067 mm) high and come with either two crossbars or an infill panel that comply with the 4" (102 mm) sphere requirements of some building codes
- Drapery closures and backdrops are available to give stage a finished look
 - stage and backdrop drapery available in a wide variety of colors
 - drapery is 100% fire retardant polyester woven fabric



Straight Forward, Simple Operation

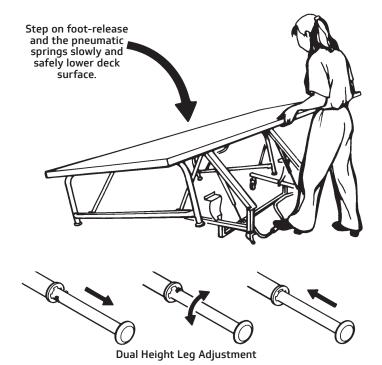



PRCLANC



© 2024 Wenger Corporation