


Stagemobile® Staging

- All-aluminum frame resists the elements during use and is designed for long-term outdoor storage.
- Three stage sizes:
 - 16' x 16' (4.9 x 4.9 m) single axle
 - 16' x 20' (4.9 x 6.1 m) double axle
 - 16' x 24' (4.9 x 7.3 m) double axle.
- Stage height is 36" (914 mm).
- Deck surface covered with skid- and UV-resistant material. Stage load rating is 150 lbs/ft² (732 kg/m²).
- Easy, one-person setup, with gas-assist springs and built-in leveling jacks.
- Retractable tongue provides access around entire stage perimeter, for adding Wenger Versalite stage extensions and arranging multiple Stagemobiles together.
- Capable of being towed at normal highway speeds. Consult tow vehicle manufacturer for maximum speeds and load ratings.
- Tow vehicle requires electric brake controller (not included) and standard 7-pin electrical connector (not included) for brakes and lighting. Standard, self-powered breakaway safety switch engages brakes.
- Standard 2-5/16" (59 mm) ball receiver, fenders, DOT-required lights and safety chains included.
- In storage and transport position, Stagemobile width is 8' 6" (2591 mm).
- Integral tiedown tracks provide anchoring points for accessories and other equipment during transport, with snap-in covers concealing tracks during performances.
- Environmental attributes and LEED compliance for this product can be found at www.wengercorp.com/GREEN or by contacting your Wenger representative.
- Five-year warranty.

Options

- Under-stage storage for hauling equipment and gear.
- Guardrails, stairways and lockable access panels for storage area.
- Snap-on skirting made from durable, weather-resistant material.
- Custom fabric colors and graphics are available for road cover and skirting.

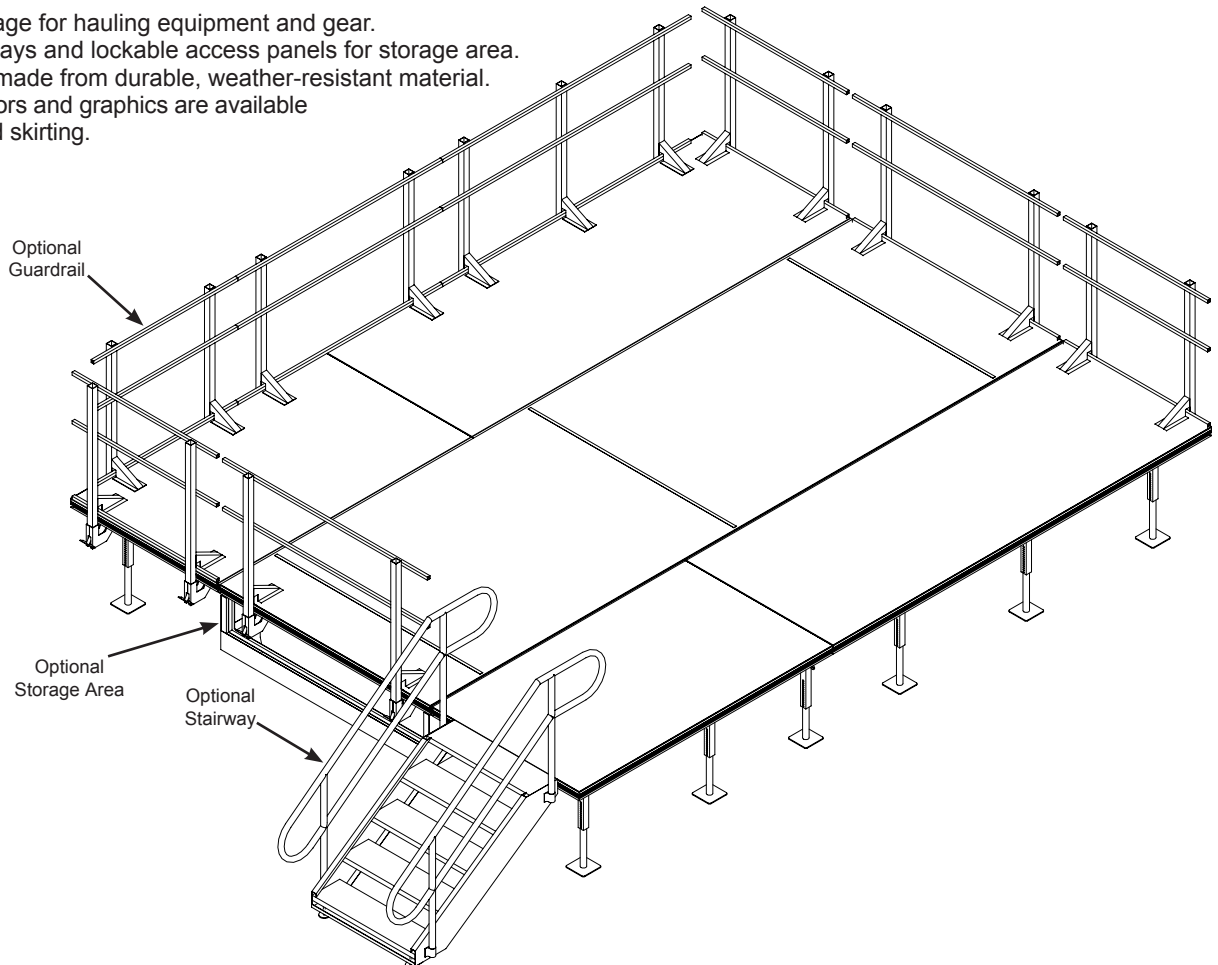

© 2017 Wenger Corporation
USA/2017-12/W

