
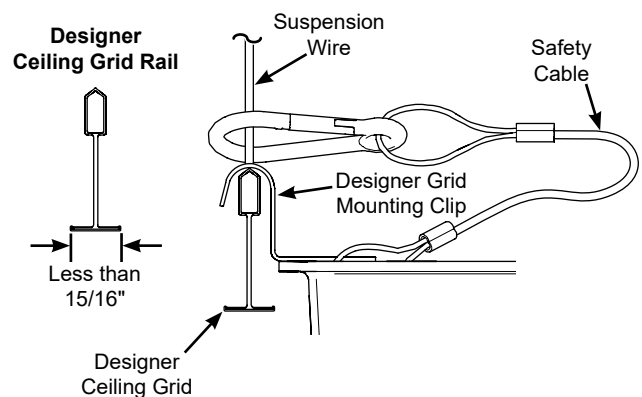
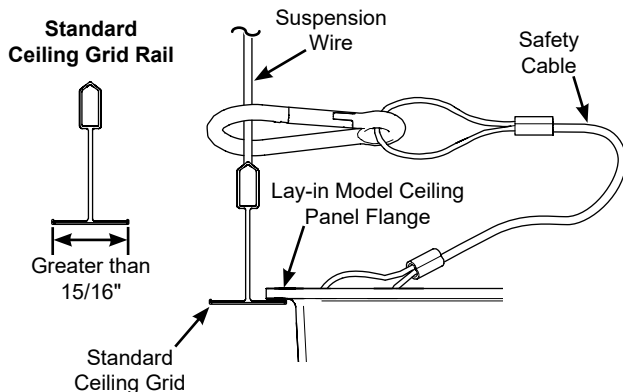


# Traditional Acoustic Panel Series: Quadratic Ceiling Diffuser Panels

- Designed to work very effectively over a frequency range of 750 to 3300 Hz
- Diffuser designed based on the quadratic theory using a series of four different well depths with seven wells per sequence and three sequences per panel
- 4' x 4' (1219 x 1219 mm)
- Weight - 35 lb (16 kg)
- Detailed polar plots of TEF measurements available on request
- Wells are 2.1" (53 mm) wide with a maximum depth of 5.2" (132 mm). Panel depth is 6" (152 mm)
- Constructed of thermo molded plastic, 0.125" (3mm) material thickness
- Final assembly meets 2018 IBC requirements for Class A interior finishes
- Surface is paintable using latex acrylic paint only
- Lay-In ceiling panels attach securely to a suspended ceiling grid (safety cables provided)
- For a suspended ceiling grid, please specify if using standard or designer grid system
- Clip-In ceiling panels may be direct mounted to permanent ceiling, or suspended from ceiling by wire from four corner hooks
- Environmental attributes and LEED compliance for this product can be found at [www.wengercorp.com/GREEN](http://www.wengercorp.com/GREEN) or by contacting your Wenger representative
- Recyclable
- Five-year warranty

## Installation

- Tee-Grid System must meet or exceed intermediate duty A.S.T.M. specifications
- A minimum of 12" (305 mm) is needed between Tee-Grid System and any obstructions above Tee-Grid System

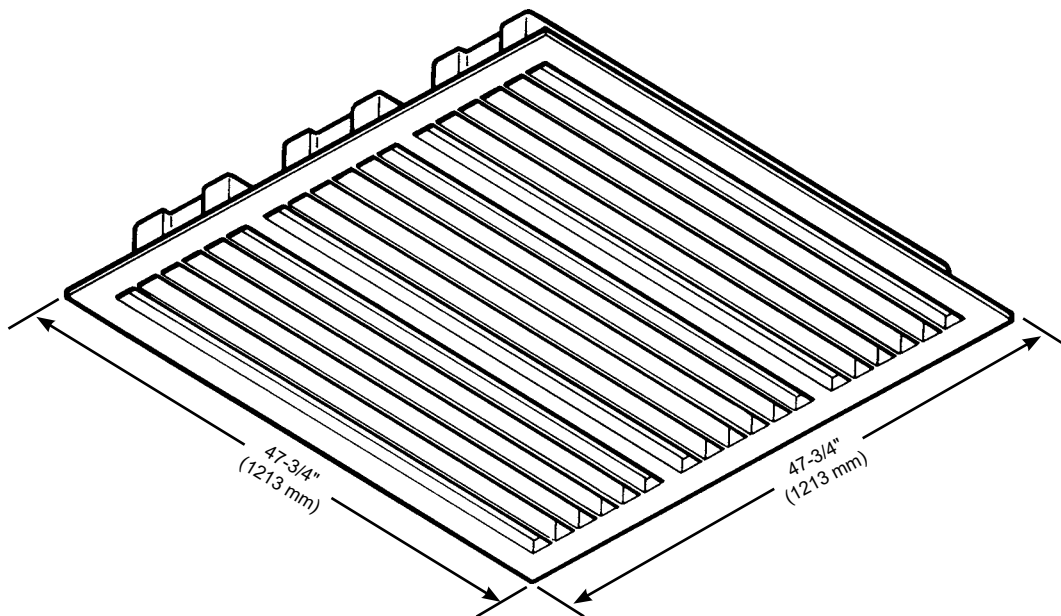

## Acoustical Performance

- Upper Design Frequency (f max.) 3300 Hz
- Lower Design Frequency (f min.) 750 Hz
- Number of wells (N) 7
- Largest Sequence (S max.) 4
- Maximum well depth (d max.) 5.2" (132 mm)
- Well width 2.1" (53 mm)
- Number of sequences per panel 3

| Absorption Coefficients<br>Octave Bands |      |      |      |      |      |      |
|---|------|------|------|------|------|------|
| Frequency (Hz)                          | 125  | 250  | 500  | 1000 | 2000 | 4000 |
| Absorption Coefficient                  | 0.36 | 0.54 | 0.59 | 0.43 | 0.24 | 0.19 |
| E-400 Mounting                          |      |      |      |      |      |      |



© 2020 Wenger Corporation  
USA/2020-12

### MUSIC EDUCATION AND PERFORMING ARTS

Owatonna Office: Phone 800.4WENGER (493-6437) Worldwide +1.507.455.4100 | Parts & Service 800.887.7145 | wengercorp.com  
555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

Syracuse Office: Phone 800.836.1885 Worldwide +1.315.451.3440 | jrclancy.com | 7041 Interstate Island Road | Syracuse | NY 13209-9713

**ATHLETICS** Phone 800.493.6437 | email gearboss@wengercorp.com | gearboss.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448