

Studio[®] Makeup Station — 30" Model

Wenger[®]

Your Performance Partner

The Wenger Studio Makeup Station will provide performers with a correct and convenient environment for applying makeup and creating other visual effects. The Studio Makeup Station components include a generous counter, a large mirror, a reflective storage shelf, untainted lighting and electrical outlets.

The Studio Makeup Station is intended to be permanently attached to a wall and hard-wired.

- 187A009 30" Studio Makeup Station, eight lights with white accent panels
- 187A010 30" Studio Makeup Station, five lights with white accent panels.
- Environmental attributes and LEED compliance for this product can be found at www.wengercorp.com/GREEN or by contacting your Wenger representative.
- Five-year warranty.

The Counter

- Construction: Medium density fiberboard core and laminate overlay with a stain resistant surface and a matte white finish for light diffusion.
- Features: Rounded upper edges, integral pencil tray.
- Size: 30" wide x 20" deep (762 x 508 mm) with a concave shape for mirror access. 15" (381 mm) from counter edge to mirror surface.
- Load Capacity: 75 lbs (34 kg).
- Work surface is 29" (737 mm) from floor.

The Mirror

- Construction: High quality glass and silvering laminated to a steel backer to prevent separation of shards if broken.
- Size: 22" x 28" (559 mm x 711 mm).

The Mirror Surround

- Construction: Extruded aluminum with white accents. Sheet steel at the base of the mirror.
- Powder-coat paint with a matte white finish for light diffusion.

The Shelf


- Construction: Medium density fiberboard core and laminate overlay with an easy to clean surface and a matte white finish for light diffusion.
- Size: 30" wide x 12" deep (762 x 305 mm).
- Load Capacity: 25 lbs (114 kg).
- Storage surface is 69" (1753 mm) from floor.

The Lighting

- Eight medium base sockets provided for 40-60W incandescents or 10-15W swirl fluorescents. Bulbs are protected by wire cages made from 3/16" (5 mm) diameter steel wire. Cages are permanently mounted, but allow easy bulb replacement (bulbs not included).


The Electrics

- A rocker type switch is mounted on the lower left side of the mirror surround. It controls the lights only.
- A 20 amp rated duplex outlet with built in GFCI protection is mounted on the lower right side of the mirror surround.
- 24" (610 mm) off flexible conduit and conductors exit the unit beneath the counter, next to the wall.
- **NOTE:** Separate black conductors are provided for lights and outlet to allow circuit design according to anticipated use and local codes.
- Entire product is UL[®] approved.
- A licensed electrician is required to make any electrical connections.

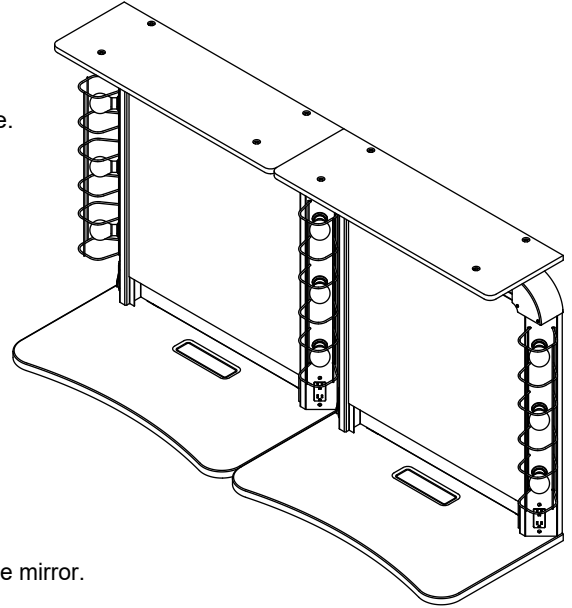

Installation

- Mounting bracket is attached to the wall, Studio Makeup Station is hung on the bracket. Mounting bracket includes leveling for multi-unit installation.
- When multiple units are installed, adjacent units share a vertical column of bulbs.
- Physical Dimensions:
 - Overall width: 34-1/2" (876 mm) bulb cage-to-bulb cage
 - Overall height: 44" (1118 mm)
 - Overall depth: 20" (508 mm)
 - Multi-unit spacing: 30" (762 mm) center-to-center
 - Weight: 72 lbs (32.7 kg).

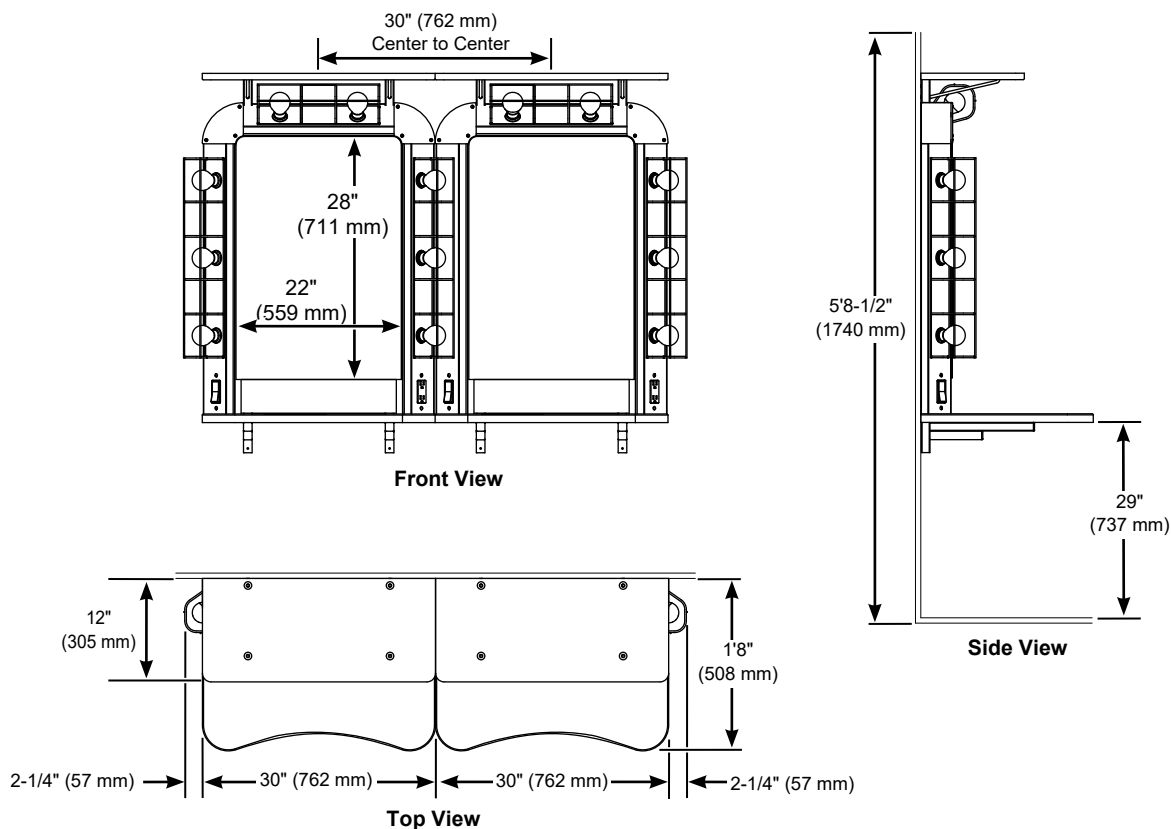

Wenger

JRCLANCY

GEARBOSS

© 2018 Wenger Corporation
USA/2018-08/W



WENGER CORPORATION

Phone 800.4WENGER (493-6437) Worldwide +1.507.455.4100 | Parts & Service 800.887.7145 | Canada Office 800.268.0148 | wengercorp.com
555 Park Drive, PO Box 448 | Owatonna MN 55060-0448

JR CLANCY

Phone 800.836.1885 Worldwide +1.315.451.3440 | jrclancy.com | 7041 Interstate Island Road | Syracuse NY 13209-9713

GEARBOSS

Phone 800.493.6437 | email gearboss@wengercorp.com | gearboss.com | 555 Park Drive, PO Box 448 | Owatonna MN 55060-0448