


Curtain Tracks – Steel Channel

- 14 gauge (1.89 mm) galvanized steel box track in 20' (6.1 m) sections.
- Manual or motorized operation.
- Can be used for bi-parting (traveler) or one way operation.
- Choice of several carrier wheel/body types.
- Carriers for heavy duty track have ball bearings.
- Carriers equipped with swivel and trim chain (chain on 280 tracks only) for hanging curtain.
- Carriers for heavy duty track have rubber bumpers to reduce noise.
- Optional back packing operation eliminates on stage bunching while opening.
- Tracks are supplied complete with all necessary accessories (CWANA), including master carriers, one individual carrier per foot, live and dead-end pulleys, end stops, hanging clamps, operating line, and adjustable floor pulley.

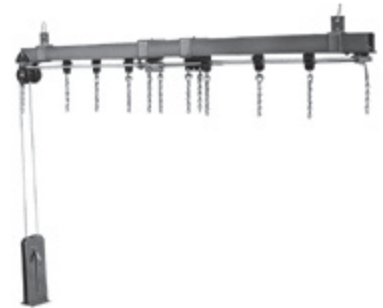

Heavy Duty Traveler Track
024-280

Order Information

Number	Carrier Material: Wheel/Body	End Pulley Diameter	Floor Pulley Diameter	Operating Line Diameter	Weight
Heavy Duty Stage Tracks — 2-5/8"W x 2-3/4"H (66.675 mm x 69.85 mm) Steel Channel					
024-280	Polyethylene/Nylon	3-1/4" (83 mm)	3-1/4" (83 mm)	3/8" (9.5 mm)	4 lbs./ft. (5.9 kg/m)
024-281	Neoprene/Steel	3-1/4" (83 mm)	3-1/4" (83 mm)	3/8" (9.5 mm)	4.5 lbs./ft. (6.7 kg/m)
024-282	Nylon/Steel	5" (127 mm)	5" (127 mm)	3/8" (9.5 mm)	4.5 lbs./ft. (6.7 kg/m)
024-283R	Neoprene/Steel	8" (203 mm)	8" (203 mm)	1/2" (13 mm)	5 lbs./ft. (7.4 kg/m)
024-283N	Nylon/Steel	8" (203 mm)	8" (203 mm)	1/2" (13 mm)	5 lbs./ft. (7.4 kg/m)
Medium Duty Stage Tracks — 1-3/4"W x 2"H (44.45 mm x 50.8 mm) Steel Channel					
024-170	Polyethylene/Steel	1-13/16" (46 mm)	3-1/4" (83 mm)	1/4" (6 mm)	3 lbs./ft. (4.45 kg/m)
024-171N	Nylon/Steel	1-13/16" (46 mm)	3-1/4" (83 mm)	1/4" (6 mm)	4 lbs./ft. (5.9 kg/m)
024-171R	Neoprene/Steel	1-13/16" (46 mm)	3-1/4" (83 mm)	1/4" (6 mm)	4 lbs./ft. (5.9 kg/m)
024-172	Polyethylene/Steel	2-1/4" (57 mm)	3-1/4" (83 mm)	5/16" (8 mm)	4 lbs./ft. (5.9 kg/m)
Contact J.R. Clancy for additional models and data.					



© 2017 Wenger Corporation
USA/2017-12/W

