


# ADA Ramp

- Ramp design meets all guidelines of the Americans with Disabilities Act (ADA) according to the 2015 International Building Code (IBC) - Section 1012.
  - Slope is not steeper than one unit vertical in twelve units horizontal (1:12).
  - Hand rails are continuous throughout ramp.
  - Clear width on ramp is a minimum of 36" (914 mm).
  - Landings are a minimum of 60" x 60" (1524 x 1524 mm) at any direction change.
  - Railings extend 12" (762 mm) at end of handrails.
  - Contrasting color indications designate any elevation changes.
- See the ADA Ramp Configurations Layout Guide for available pre-configured ramp designs.
- Ramp design allows for different ramp configurations depending upon your needs.
- Compact storage is ideal for facilities that have limited storage space.
- Parts are labeled for quick set-up.
- Ramp surface comes standard with slip-resistant Quadriple surface. Additional surfaces are available by request.
- Adjustable legs are provided for easy leveling on uneven surfaces.
- Ramp design and brackets allow for attachment to StageTek™ or Versalite® stages.
- Five-year warranty.
- Optional mid-rails are available.
- Environmental attributes and LEED compliance for this product can be found at [www.wengercorp.com/GREEN](http://www.wengercorp.com/GREEN) or by contacting your Wenger representative.

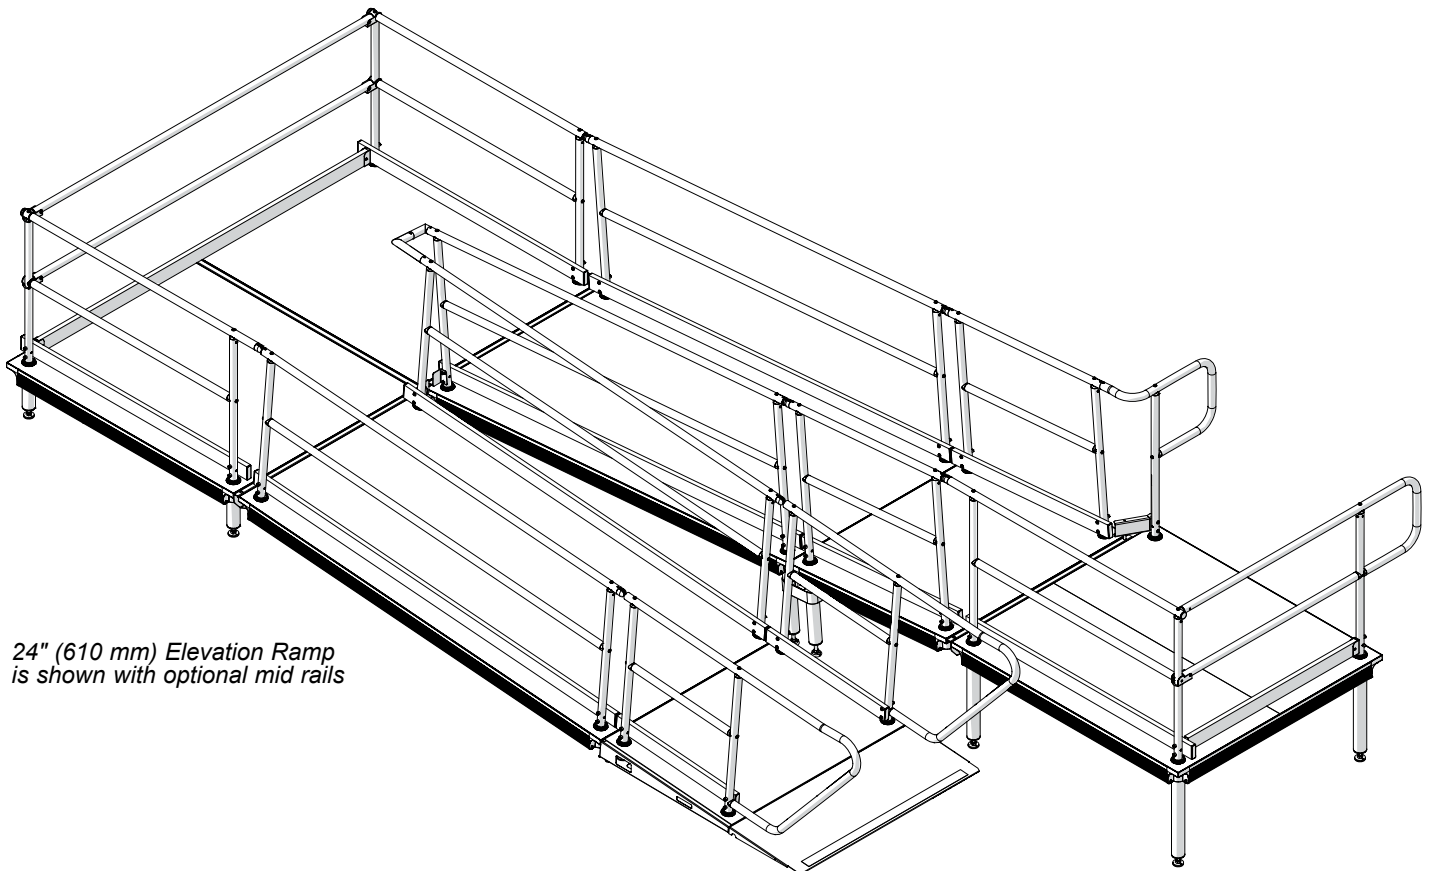

24" (610 mm) Elevation Ramp  
is shown with optional mid rails

Wenger®

JRCLANCY

GEARBOSS®

© 2018 Wenger Corporation  
USA/2018-08/W



WENGER CORPORATION Phone 800.4WENGER (493-6437) Worldwide +1.507.455.4100 | Parts & Service 800.887.7145 | Canada Office 800.268.0148 | [wengercorp.com](http://wengercorp.com)  
555 Park Drive, PO Box 448 | Owatonna MN 55060-0448

JR CLANCY Phone 800.836.1885 Worldwide +1.315.451.3440 | [jrclancy.com](http://jrclancy.com) | 7041 Interstate Island Road | Syracuse NY 13209-9713

GEARBOSS Phone 800.493.6437 | email [gearboss@wengercorp.com](mailto:gearboss@wengercorp.com) | [gearboss.com](http://gearboss.com) | 555 Park Drive, PO Box 448 | Owatonna MN 55060-0448