



Adjustable and Fixed Height Stairways

- Available in adjustable and fixed height ranges:
 - Adjustable Height Stairways
 - 3-Step Adjustable Height model 281A201 107 lb (49 kg) for stage heights from 12" to 24" (305 to 610 mm)
 - 4-Step Adjustable Height model 281A202 122 lb (55 kg) for stage heights from 16" to 32" (406 to 813 mm)
 - 6-Step Adjustable Height model 281A203 160 lb (73 kg) for stage heights from 24" to 48" (610 to 1219 mm)
 - 8-Step Adjustable Height model 281A204 188 lb (85 kg) for stage heights from 32" to 64" (813 to 1626 mm)
 - Fixed Height Stairways
 - 2-Step Fixed Height model 281A100 55 lb (25 kg) for stage heights of 16" (406 mm) or 24" (610 mm)
 - 3-Step Fixed Height model 281A101 76 lb (34 kg) for stage heights of 24" (610 mm) or 32" (813 mm)
 - 4-Step Fixed Height model 281A102 94 lb (43 kg) for stage heights of 32" (813 mm) or 40" (1016 mm)
- Load rating of 500 lb (227 kg) per stair tread
- Stairways feature a hook bracket to function with StageTek[®], Versalite[®], Trouper[®] and Type-C stage systems from Wenger
- Attaches to the stage with no tools required
- Adjustable height stairways fold down and the handrails are removable for efficient storage or truck pack
- Includes casters to assist with positioning
- Stairways will not fit through a standard 32" (813 mm) wide doorway
- Stairway complies with building code loading requirements for step treads and handrails
- 11" (280 mm) deep stairs feature aluminum extruded treads and include handrails on both sides
- Step treads are aluminum and stair structure and handrails are painted steel for maximum strength and durability for demanding outdoor applications
- Shipped ready to assemble
- Ten-year warranty

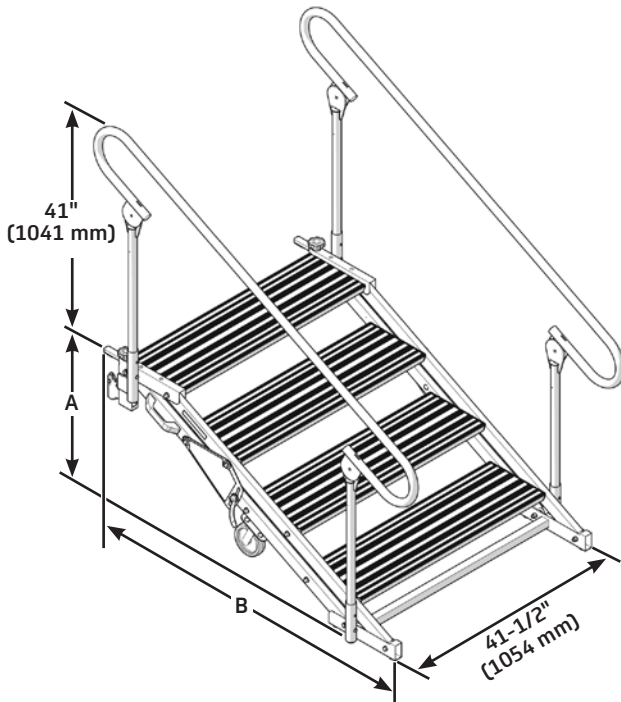

Adjustable Height Stairway
4-Step Model Shown

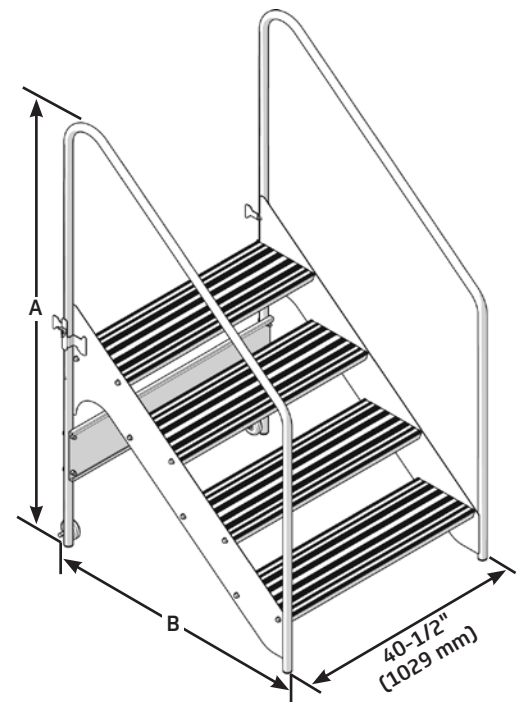


Fixed Height Stairway
4-Step Model Shown


	Dimension A		Dimension B	
	Minimum	Maximum	At Minimum	At Maximum
3-Step Adjustable Height Model	12" (305 mm)	24" (610 mm)	45" (1143 mm)	38.75" (984 mm)
4-Step Adjustable Height Model	16" (406 mm)	32" (813 mm)	57.5" (1461 mm)	49.25" (1251 mm)
6-Step Adjustable Height Model	24" (610 mm)	48" (1219 mm)	82.5" (2096 mm)	70" (1778 mm)
8-Step Adjustable Height Model	32" (813 mm)	64" (1626 mm)	107.75" (2737 mm)	91" (2311 mm)

	Dimension A	Dimension B
2-Step Fixed Height Model	55" (1397 mm)	22.75" (578 mm)
3-Step Fixed Height Model	63" (1600 mm)	33" (838 mm)
4-Step Fixed Height Model	71" (1803 mm)	43.25" (1099 mm)


Additional models are shown on the following page.

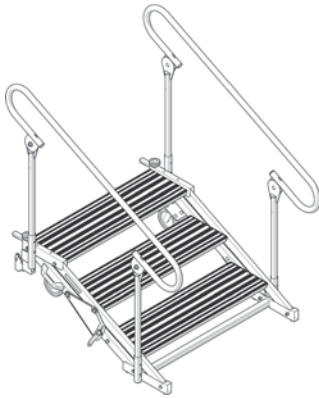


3-Step Adjustable Height Stairway
281A201
For Stage Heights from
12" to 24" (305 to 610 mm)

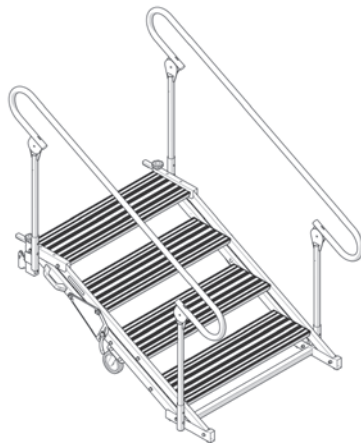


4-Step Adjustable Height Stairway
281A202
For Stage Heights from
16" to 32" (406 to 813 mm)

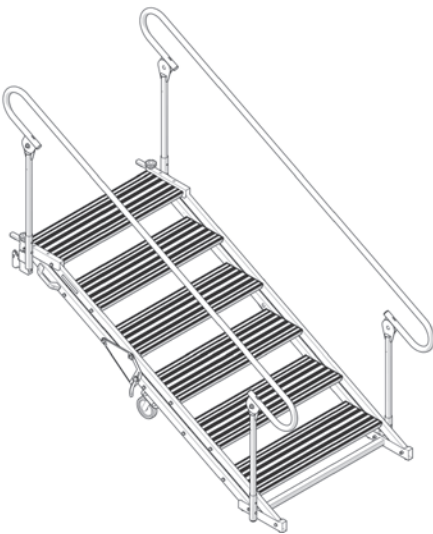


6-Step Adjustable Height Stairway
281A203
For Stage Heights from
24" to 48" (610 to 1219 mm)

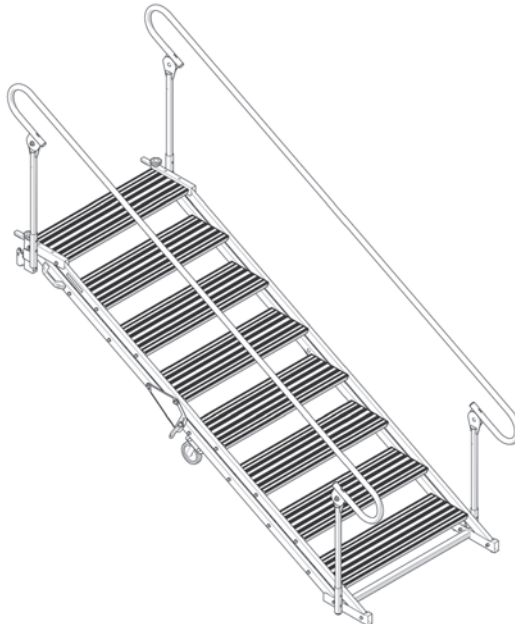


8-Step Adjustable Height Stairway
281A204
For Stage Heights from
32" to 64" (813 to 1626 mm)

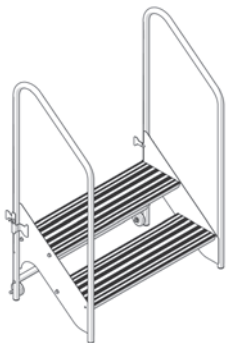

2-Step Fixed Height Stairway
281A100
For Stage Heights of
16" (406 mm) or 24" (610 mm)

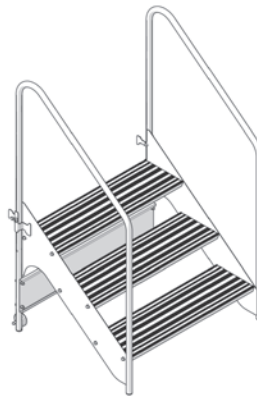

3-Step Fixed Height Stairway
281A101
For Stage Heights of
24" (610 mm) or 32" (813 mm)

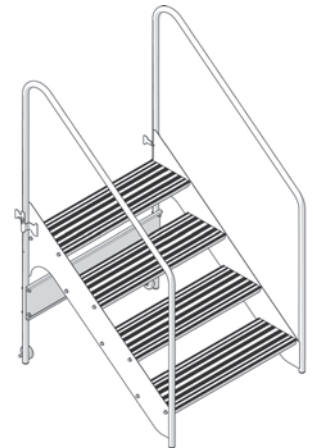

4-Step Fixed Height Stairway
281A102
For Stage Heights of
32" (813 mm) or 40" (1016 mm)



© 2024 Wenger Corporation
USA/2024-03

Minnesota Location Wenger Phone 800.4WENGER (493-6437) Wenger Worldwide +1.507.455.4100 | Parts & Service 800.887.7145 | wengercorp.com

GearBoss Phone 800.493.6437 | gearboss.com
555 Park Drive, PO Box 448 | Owatonna | MN 55060

New York Location J.R. Clancy Phone 800.836.1885 JR Clancy Worldwide +1.315.451.3440 | jrclancy.com | 7041 Interstate Island Road | Syracuse | NY 13209